

# ***MP 2.0 AND MP 2.5 ASSEMBLY MANUAL***

AM-MP-2-0  
012813

# A MESSAGE TO OUR CUSTOMERS

---

*Thank you for purchasing products from the Paramount MP line. Because of the many unique features included in these machines, this manual was created to provide you with information on how to properly install and maintain your equipment. Proper maintenance will ensure that your new equipment will last for years.*

*For your convenience, product questions can be answered by an Authorized Paramount Dealer or by contacting a Paramount Customer Service Representative at:*

*1-800-721-2121 or 1-323-721-2121*

*Office hours are Monday-Friday, 7:30 am - 4:30 pm PST*

*Or email us at [nasales@paramountfitness.com](mailto:nasales@paramountfitness.com)*

*Thank You for your patronage.*

*Paramount Fitness Corporation  
6450 East Bandini Blvd.  
Los Angeles, CA 90040*

## **WARNING**

**SERIOUS INJURIES TO USERS, BYSTANDERS OR INSTALLERS CAN OCCUR IF THE INSTRUCTIONS AND WARNINGS CONTAINED IN THIS MANUAL ARE NOT FOLLOWED. TO MINIMIZE THIS RISK, READ THE MANUAL BEFORE BEGINNING THE INSTALLATION TO FAMILIARIZE YOURSELF WITH ITS CONTENTS AND THEN BE CERTAIN TO FOLLOW EACH OF THE STEPS AND PRACTICES DESCRIBED. IN ADDITION, REVIEW THE GENERAL MAINTENANCE MANUAL, FACILITY SIGN AND OTHER DOCUMENTS THAT MAY ACCOMPANY EACH MACHINE, FOR IMPORTANT SAFETY AND MAINTENANCE TIPS. THE MANUAL HAS BEEN INCLUDED WITH YOUR MACHINE ORDER AND CAN ALSO BE DOWNLOADED FROM OUR WEBSITE AT: <http://www.paramountfitness.com>**

**PLEASE RETAIN THIS MANUAL FOR FUTURE REFERENCE.**

# TABLE OF CONTENTS

---

<b>SAFETY.....</b>	<b>4</b>
<b>GENERAL CARE AND MAINTENANCE.....</b>	<b>7</b>
<b>DIMENSIONS AND WEIGHT.....</b>	<b>8</b>
<b>PREPARATION.....</b>	<b>9</b>
<b>UPRIGHT CARTON CONTENTS.....</b>	<b>10</b>
<b>CHEST PRESS CARTON CONTENTS.....</b>	<b>11</b>
<b>LEG EXT/CURL CARTON CONTENTS.....</b>	<b>12</b>
<b>ACCESSORIES AND WEIGHTS.....</b>	<b>13</b>
<b>INSTALLATION &amp; ASSEMBLY</b>	
<b>STEP 1: ASSEMBLE THE CHEST PRESS.....</b>	<b>14</b>
<b>STEP 2: ASSEMBLE THE PADS.....</b>	<b>15</b>
<b>STEP 3: ASSEMBLE THE PRESS ARM.....</b>	<b>16</b>
<b>STEP 4: INSTALL CHEST PRESS CABLE.....</b>	<b>17</b>
<b>STEP 5: INSTALL THE LOW PULLEY CABLE.....</b>	<b>19</b>
<b>STEP 6: ASSEMBLE THE LEG EXT/CURL MAIN FRAME.....</b>	<b>23</b>
<b>STEP 7: ASSEMBLE THE LEG EXT/CURL FRONT FRAME.....</b>	<b>24</b>
<b>STEP 8: ASSEMBLE THIGH PAD.....</b>	<b>25</b>
<b>STEP 9: ASSEMBLE THE ADJUSTMENT ARM.....</b>	<b>26</b>
<b>STEP 10: ASSEMBLE THE PADS AND HANDLES.....</b>	<b>27</b>
<b>STEP 11: INSTALL LEG EXT/CURL CABLE.....</b>	<b>29</b>
<b>STEP 12: INSTALL THE CHEST PRESS WEIGHT STACK.....</b>	<b>32</b>
<b>STEP 13: INSTALL THE LEG EXT/CURL WEIGHT STACK.....</b>	<b>34</b>
<b>STEP 14: ASSEMBLE THE FRONT SHROUD.....</b>	<b>35</b>
<b>STEP 15: ASSEMBLE THE LEG EXT/CURL BRACE.....</b>	<b>36</b>
<b>STEP 16: ASSEMBLE THE REAR SHROUDS.....</b>	<b>37</b>
<b>STEP 17: PLACE THE WEIGHT STACK LABELS.....</b>	<b>38</b>
<b>STEP 18: INSTALL THE BOLT CAPS.....</b>	<b>39</b>
<b>PROCEDURE LABEL.....</b>	<b>41</b>
<b>WARNING LABELS.....</b>	<b>42</b>
<b>SERVICE.....</b>	<b>43</b>
<b>PARAMOUNT LIMITED WARRANTY.....</b>	<b>44</b>

# SAFETY

---



## **FACILITY AND USER SAFETY PRECAUTIONS**

1. Review and understand all of the warning labels affixed to this machine and on the facility safety sign.
2. Be certain that the machine operation is understood before it is used. Refer to the instructional Procedure Label affixed to the machine.
3. Make sure all users are properly trained on how to use this equipment. If this machine is being used in a commercial setting, end users may not have access to this Owners Manual. It is the responsibility of the facility to instruct users as to the proper usage of the equipment as well as making them aware of potential hazards. Maximum user weight is 300 lbs (136 kg).
4. Use each machine only for the intended exercise. Do not allow anyone to invent exercises not included on the Instructional Procedure Label or the Intended Use Label.
5. Do not modify the machine.
6. This equipment meets industry safety standards for stability when used for the intended exercise. Do not allow straps, resistance bands or other means to be attached to the framework of this machine to perform stretching or body weight exercises. This can result in machine instability and lead to serious crushing injuries.
7. Keep children away from this equipment. Adults should closely supervise use by teenagers.
8. It is recommended that users receive a thorough medical exam before commencing an exercise program. All medical issues should be reviewed to ensure that weight training will not aggravate pre-existing medical conditions.
9. If the machine appears damaged or inoperable, contact a facility staff member to place an "OUT OF ORDER, DO NOT USE" sign on the machine until it is repaired. Only use Paramount supplied replacement components to service this machine.
10. Instruct users not to wear loose or dangling clothes or have headphone wires hanging when using this equipment.
11. Do not attempt to free any jammed assemblies by yourself as this may cause injury.
12. On Plate Loaded and Free Weight machines:
  - 12a. Use of spotter(s). Instruct users to seek the advice of the facility staff as to the appropriate use of spotters when lifting. More than one spotter may be required depending upon the amount of weight being lifted.
  - 12b. Instruct users to load weight plates evenly and carefully (one side and then the other) to avoid tipping equipment and crushing injuries.
  - 12c. If the machine is equipped with safety stops or catches, inspect them and verify their proper operation before use and make sure they are securely in place before using or exiting the machine. Be certain members are instructed on how to operate and adjust all safety mechanisms.



12d. This equipment is designed for standard olympic size weight plates with a 50mm bore (1.9").

12e. Do not exceed the maximum weight capacity of the machine. Maximum plate size is 45 lbs. (25 kg.).

**13. On Selectorized and Cable equipped machines:**

13a. Do not allow users to perform any exercise by holding the end of the cable and/or the cable end fitting. Use only appropriate handles or attachments properly connected to the cable end.

13b. Do not high-pin or double-pin the weight stack. Do not allow the machine to be used if the top plate or weight stack is pinned in a raised position. Use an assistant and carefully return the machine to the proper position with the cap plate resting on the top weight. Inspect the entire length of the cable to ensure that it is properly seated in all of the pulley grooves.

13c. Do not allow the use of weight plates or dumbbells to be used as a means to add additional weight to the weight stacks. Use only the Paramount adder weight system specifically designed for the machine.



## **INSTALLATION SAFETY PRECAUTIONS**

1. Read this Installation Manual entirely before assembling this equipment.
2. Verify that there is adequate space surrounding this piece of equipment for safe access and operation. Installation must meet ADA requirements for accessibility.
3. Install this piece of equipment on a solid level surface that does not deviate more than 1/8" over a 10' distance (or as defined and required by local building and architectural codes.
4. Paramount strongly recommends that all equipment be anchored to the floor to prevent movement and increase stability.
  - Due to the wide variation of flooring on which the unit can be installed, contact a qualified contractor to determine an appropriate fastening system for your floor.
  - Use 3/8" diameter hardware (10 mm) to anchor the machine. Anchors should have a minimum pull out force of 220 lbs (110 kgs) for each position.
  - When attaching the machine to the floor, if there is a gap between the machine foot and the floor, do not use the anchor to remove the gap as this can cause the machine frame to deform. Instead, place a shim between the bottom of the foot and the floor, then tighten the anchor.
  - Anchoring holes are provided on the feet of the frame. All anchoring locations must be used when anchoring the equipment to the floor.
5. DO NOT install any fitness equipment near a pool, hot tub or other damp locations. Corrosion caused by installation in these locations can lead to premature failure of components.
6. Be sure all hardware is tight before using this machine.


# SAFETY



## MAINTENANCE SAFETY PRECAUTIONS

1. Refer to Maintenance Schedule label on the machine as well as this manual for when to perform maintenance.
2. Check the function of your machine **DAILY** by verifying the following:
  - Inspect cables and end fittings for any signs of wear. Replace if worn, frayed or damaged with original Paramount replacement components.
  - Verify that all adjustments are possible and carried out with ease. Make sure that each adjustment pin inserts completely into each position without binding.
  - Verify that safety catches and stops are in proper working order and engaged.
  - Verify that the exercise is performed smoothly, free of noise and/or binding.
  - If equipped with a weight stack, verify that the proper weight selector pin is in place.
3. Check the function of your machine **WEEKLY** by verifying the following:
  - **Nuts, Bolts, and Fasteners:** Check tightness weekly. If any hardware has become loose, retighten and/or use Loctite™ Threadlocker 242.
  - **Frames and Lifting Arms:** Inspect weekly for integrity and function. Replace any component at first signs of wear. Use only Paramount supplied components.
4. Replace any warning label at first sign of wear. Labels and the Facility Safety Sign may be obtained from Paramount free of charge.

## BOLT LENGTH MEASURING GUIDE

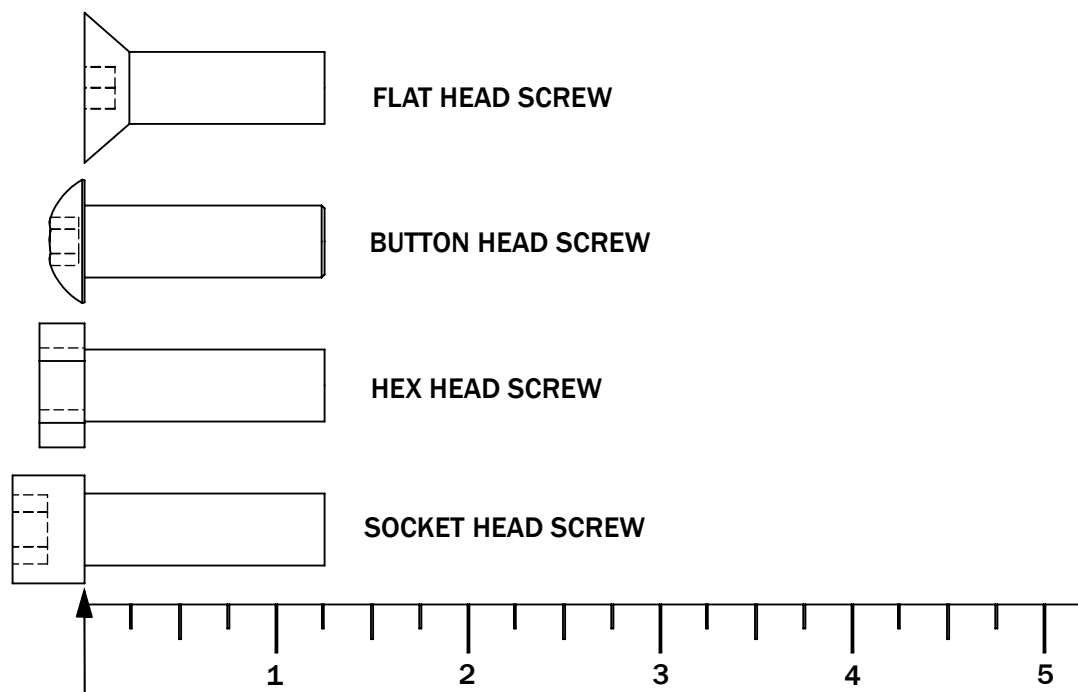

# GENERAL CARE AND MAINTENANCE

---



## **IMPORTANT**

Preventative maintenance is crucial to maintaining the function and safety of this equipment. Your facility must establish written guidelines for preventative maintenance and keep written or online records of the maintenance performed on these products. As a minimum, the items presented in the SAFETY section of this document and the items that follow here, should be included in your maintenance program.


1. **Cables:** Inspect end fittings daily for wear. Inspect the entire length of the cable weekly. Replace cables at the first sign of wear and on an annual basis. If the cable tension has been adjusted, be certain that the cable nut is tight.
2. **Nuts, Bolts, and Fasteners:** Check tightness weekly. If any hardware has become loose, retighten and/or use Loctite™ brand Threadlocker 242. Be sure all hardware is tight before using the machine.
3. **Safety Catches:** Inspect catches, stop rods and their associated fasteners weekly. Tighten any loose hardware and replace any components at first signs of wear.
4. **Frames:** Wipe all machines down with a damp cloth and dry completely each day. This includes painted parts, chrome parts and upholstered pads.
5. **Painted and chrome plated parts:** Use Simple Green or similar cleaner for light dirt and grime. Use Turtle Wax Polishing Compound or a good car polish to remove heavier dirt and grease as well as for polishing. DO NOT use solvents, lacquer thinner, acetone or finger nail polish remover. For scuffs and marks that are not removed by the above methods use a soft scrub cleanser. Make sure all parts are dry upon completion.
6. **Weight stack enclosures (shrouds):** Wipe down with a damp cloth as needed.
7. **Exercise instruction labels:** Clean with soap and water as needed.
8. **Guide rods:** Wipe all dirt and dust from the guide rods before applying a light application of Tri-Flow™ or other teflon spray lubricant. Spray the Tri-Flow™ on a rag and then wipe the guide rods with the rag. DO NOT use oil lubricants such as WD-40. Caution: Tri-Flow™ will stain carpet and clothing.
9. **Bronze bushings:** Check monthly for signs of wear and replace as needed.
10. **Linear Bearing Shafts:** Wipe any accumulation of dust or other contaminants from the shafts on a weekly basis. Apply a thin layer of a Teflon® (PTFE) grease on a weekly basis. Paramount recommends Magnalube® brand.
11. When replacing any component, use only Paramount supplied parts.
12. Please refer to the General Maintenance Manual (part number: AM-GMM) for other important safety and maintenance information.
13. Be sure all hardware is tight before using the machine.

**Retain these instructions** for future reference.

If you have any questions, do not hesitate to contact your Paramount dealer or Paramount Fitness Corp. at (800)721-2121 or [nasales@paramountfitness.com](mailto:nasales@paramountfitness.com).

# DIMENSIONS AND WEIGHT

## “IN USE” MACHINE DIMENSIONS

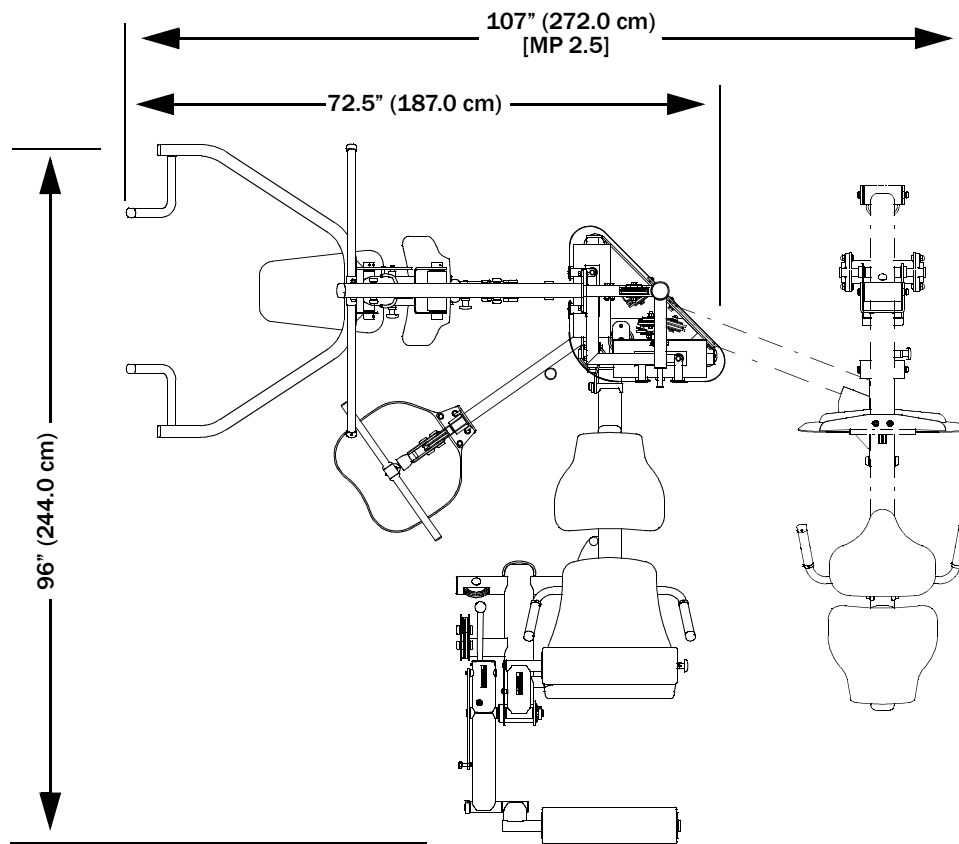

Machine Height: 83.75" (212.7 cm)


## MACHINE WEIGHT AND FLOOR LOADING

<u>WEIGHT STACK CONFIGURATION</u>	<u>MACHINE WEIGHT W/OUT LEG PRESS</u>	<u>MACHINE WEIGHT WITH LEG PRESS</u>	<u>APPROXIMATE FLOOR LOADING</u>
2 X 170 lbs.	850 LBS [386 KG]	985 LBS [447 KG]	79 LBS/FT <sup>2</sup> [385 KG/M <sup>2</sup> ]
1 X 170 lbs. and 1 X 250 lbs.	930 LBS [422 KG]	1065 LBS [483 KG]	85 LBS/FT <sup>2</sup> [416 KG/M <sup>2</sup> ]
2 X 250 lbs.	1010 LBS [458 KG]	1145 LBS [519 KG]	92 LBS/FT <sup>2</sup> [447 KG/M <sup>2</sup> ]


MAXIMUM USER WEIGHT IS 300 LBS. (136 KG.)

# PREPARATION


## REQUIRED TOOLS



Ratchet Wrench and Sockets:  
1/2" , 9/16", 6" ratchet extension



Wrenches: 1/2" , 9/16" , 7/8" and 15/16"  
(or an adjustable crescent wrench).




Rubber mallet.



Allen wrenches: *(included with the machine)*  
3 mm, 5 mm, 6 mm, 8 mm,

## Hardware Measurement Guide:

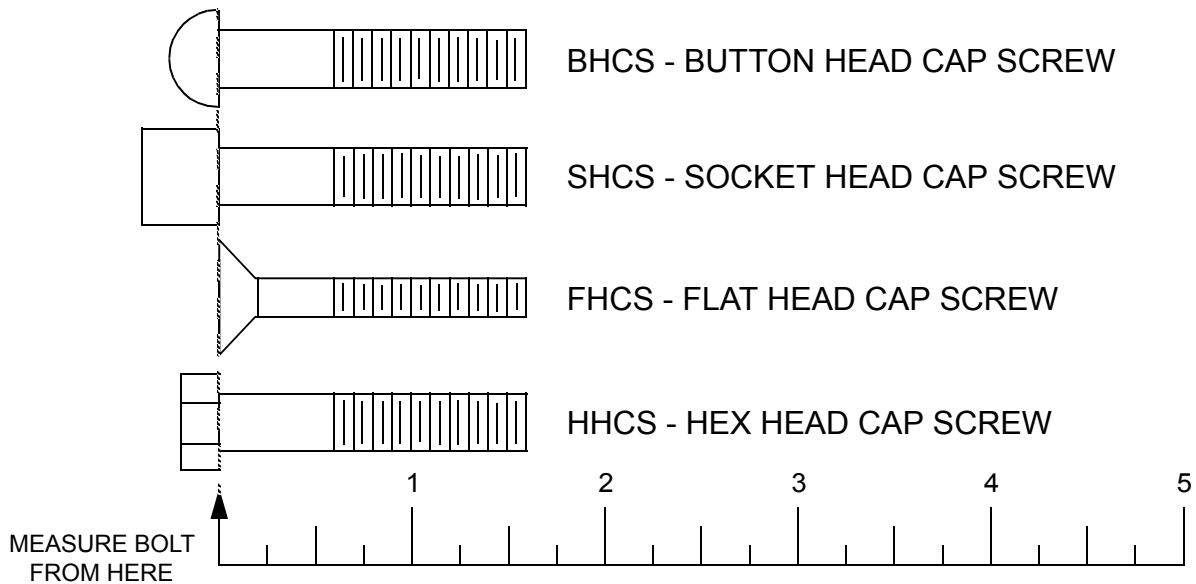

### **Before you Begin**


Hardware and components are indicated with a balloon. Refer to the hardware tables that accompany each step for corresponding size and type.

Be sure all hardware is tight before using the machine.


# UPRIGHT CARTON CONTENTS


(Carton: MP2CTN1)

Included in this box:  
-All Hardware  
-Assembly Manual  
-Weight Stack Labels

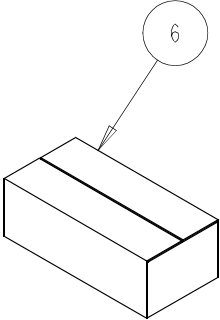


ITEM	PART NO.	DESCRIPTION	QTY
1	P01-1816	ASSY, GUIDE ROD	4
2	P04-1341	UPRIGHT FRAME	1
3	P04-1362	SHROUD, CP	1
4	P04-1363	SHROUD, FRONT	1
5	P04-1364	SHROUD, LP	1
6	HW-BOX-MP2	MP 2.0 HARDWARE BOX	1

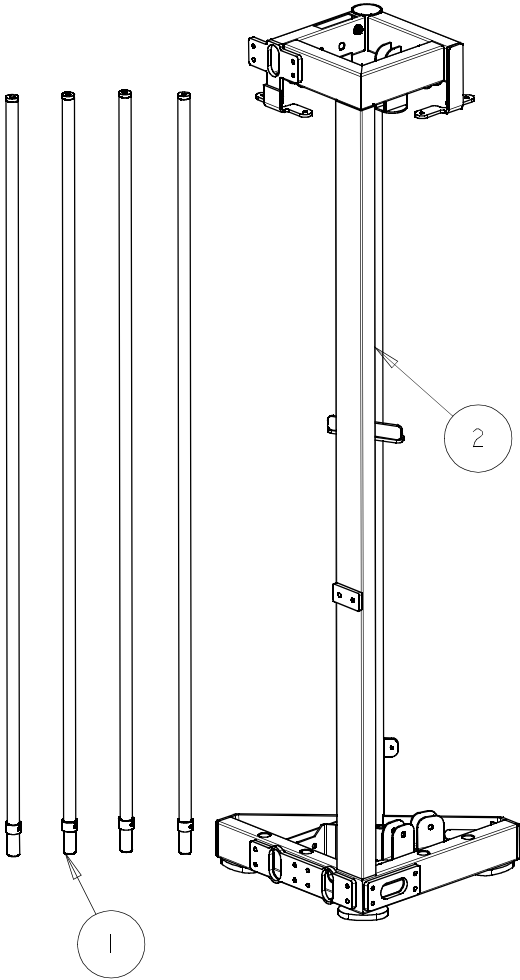

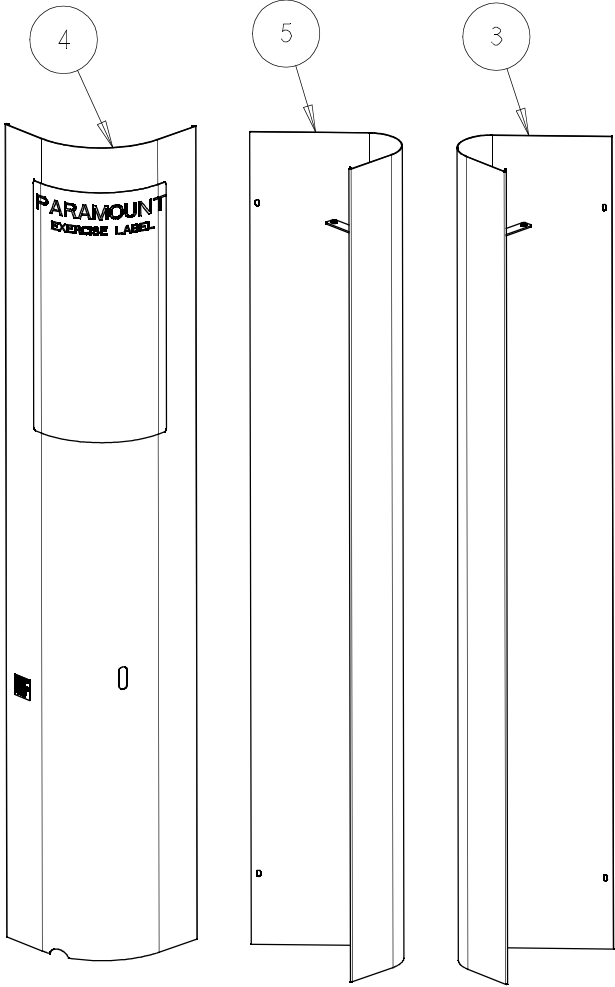


# CHEST PRESS CARTON CONTENTS

(Carton: MPCPCTN)

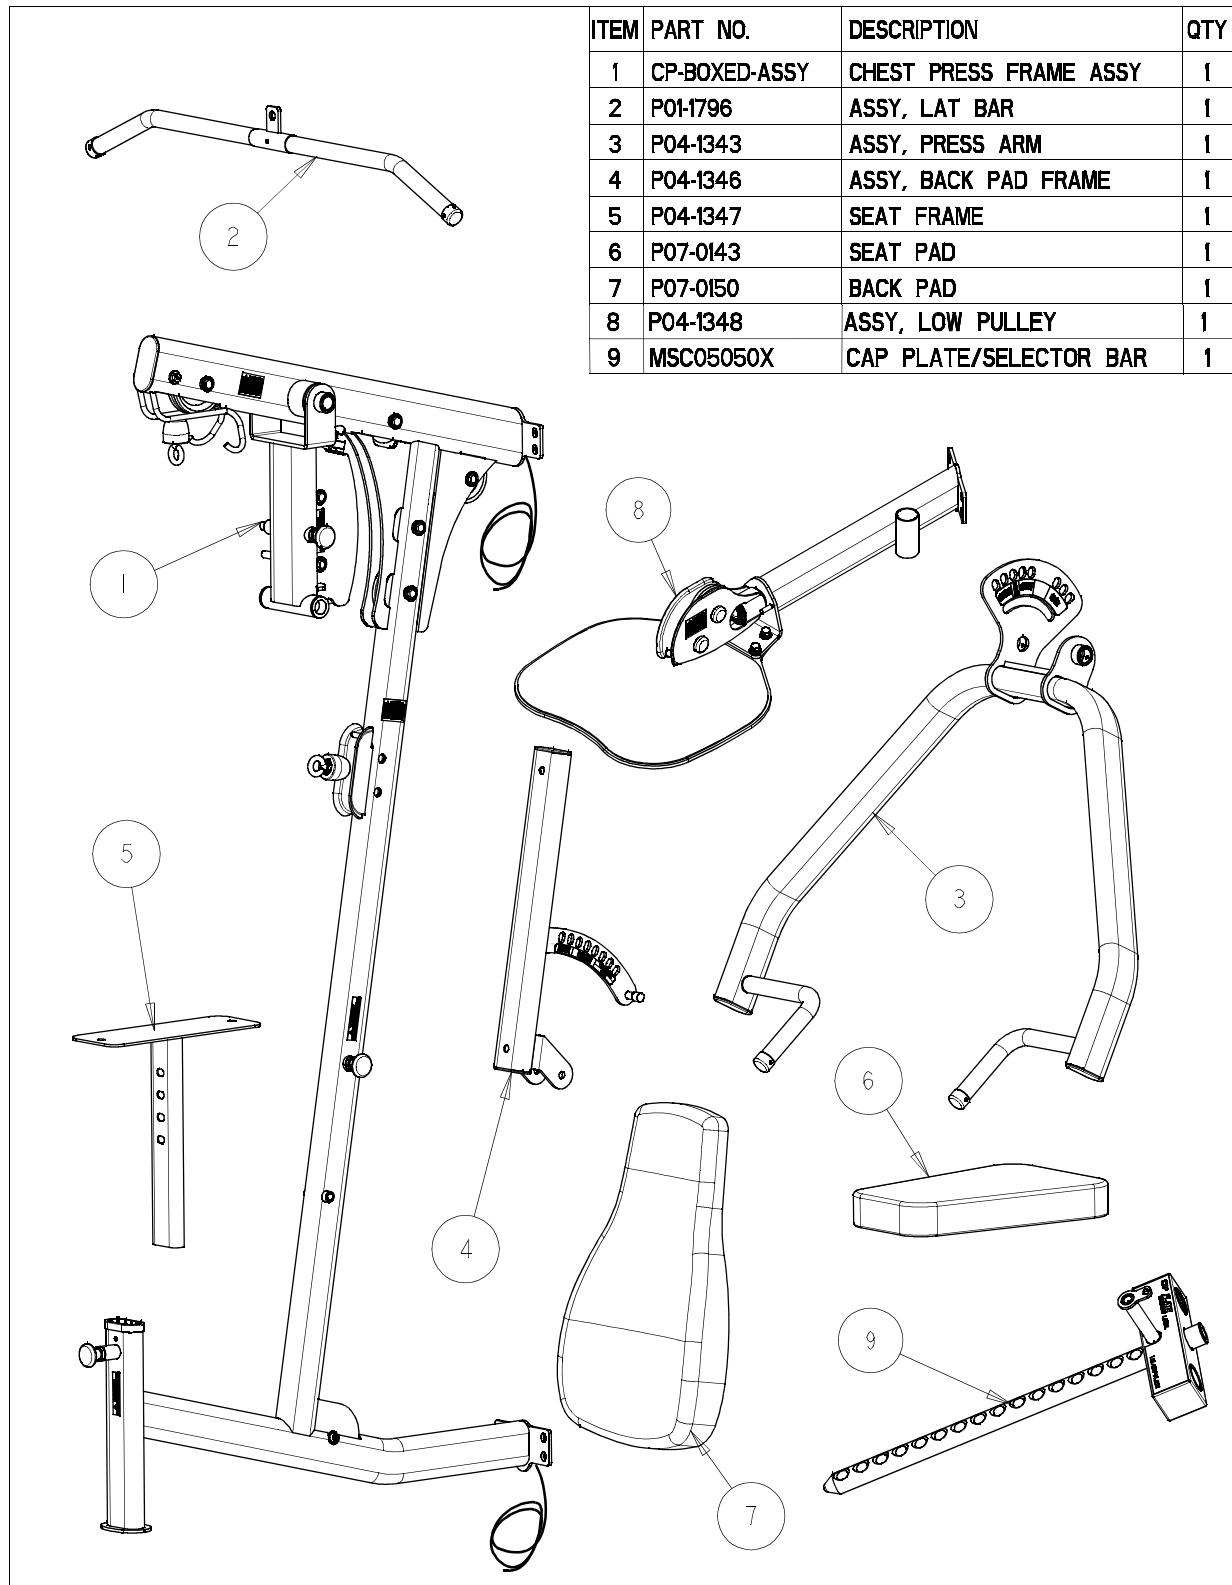

# LEG EXT/CURL CARTON CONTENTS

(Carton: MPLECTN)

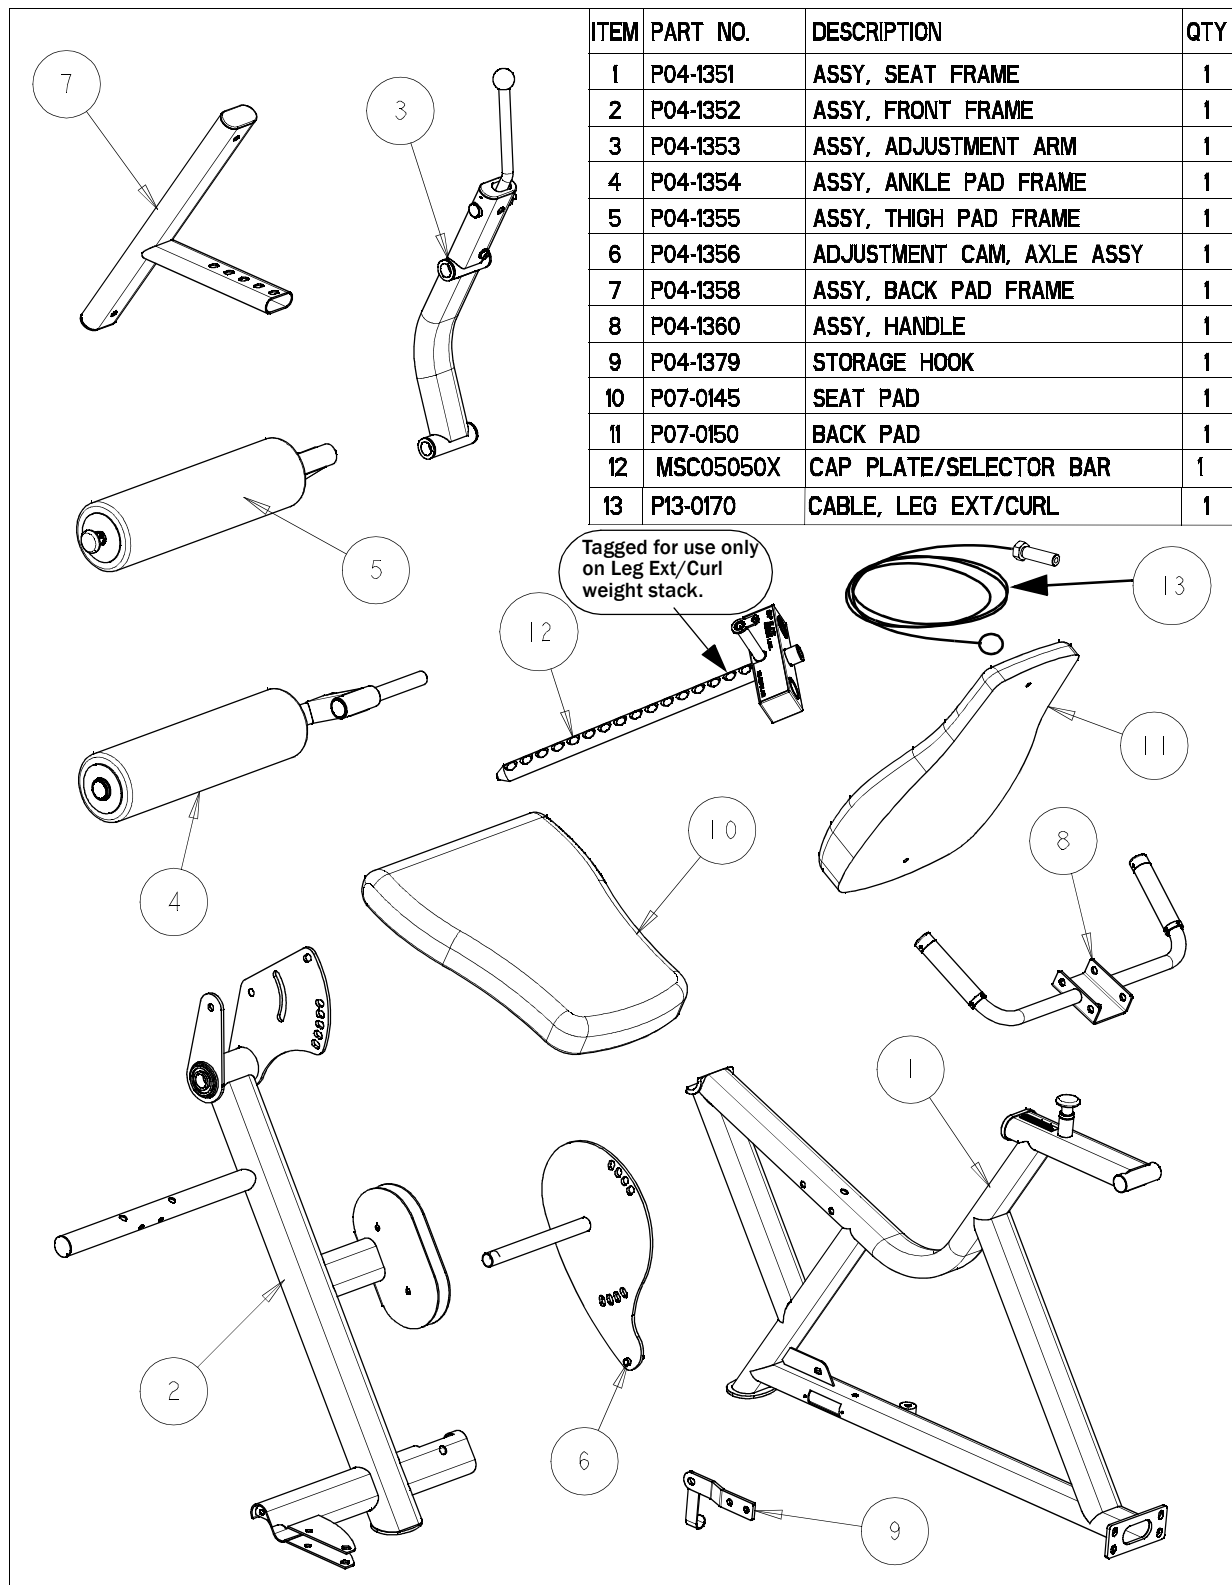




# ACCESSORIES AND WEIGHTS

## Accessories

The following pieces are included in the Chest Station Box.


- Ab Strap
- Handle Strap
- Ankle Strap
- Chain Extension
- Straight Bar.

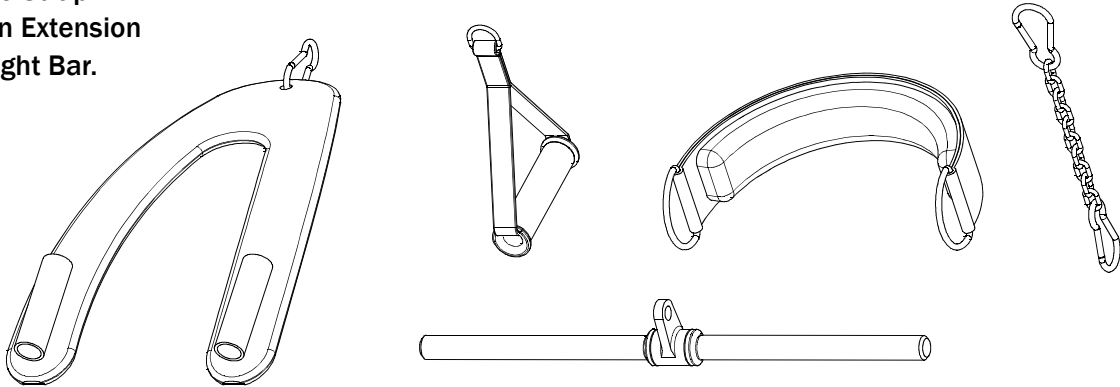

## Weight Plate Cartons

Weight plates are packaged (4) per box. You should have (8) boxes of weights. This will give you a total of 32 weight plates, (16) weight plates per stack.

The weight plates are available in two different sizes, 10 lbs. and 15 lbs. You may receive a combination of the two weight plate sizes depending on your order.

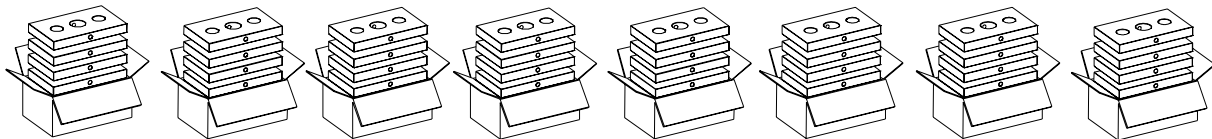

### **10 LB. Weight Plate Box**

Part Number: B1602

Comprised of  
(4) x 10 lb. Weight Plates

**OR**

### **15 LB. Weight Plate Box**

Part Number: B1603

Comprised of  
(4) x 15lb. Weight Plates

# STEP 1: ASSEMBLE THE CHEST PRESS

1. Place upright frame and chest press frame squarely on the floor.

2. Insert the pre-assembled cable from the top of the chest press frame into the upright as shown.


3. Insert the pre-assembled cable from the bottom of the chest press frame into the upright as shown.

4. Loosely assemble ALL hardware shown in this step.

5. After aligning all component edges and surfaces, tighten the hardware.

6. Install the rubber feet


ITEM	PART NO.	DESCRIPTION	QTY
1	C-444	SCREW, HEX, 3/8-16 X 3/4, GR 5, ZP	8
2	C-749	WASHER, LOCK, 3/8, ZINC	8
3	C-754C	WASHER, FLAT, 3/8 SAE, ZP	8
4	C-955A	BASE, BOLT COVER, 3/8	4
5	CP-BOXED-ASSY	CHEST PRESS FRAME ASSY	1
6	P04-1341	UPRIGHT FRAME	1
7	P06-0508	FOOT, MOLDED	4

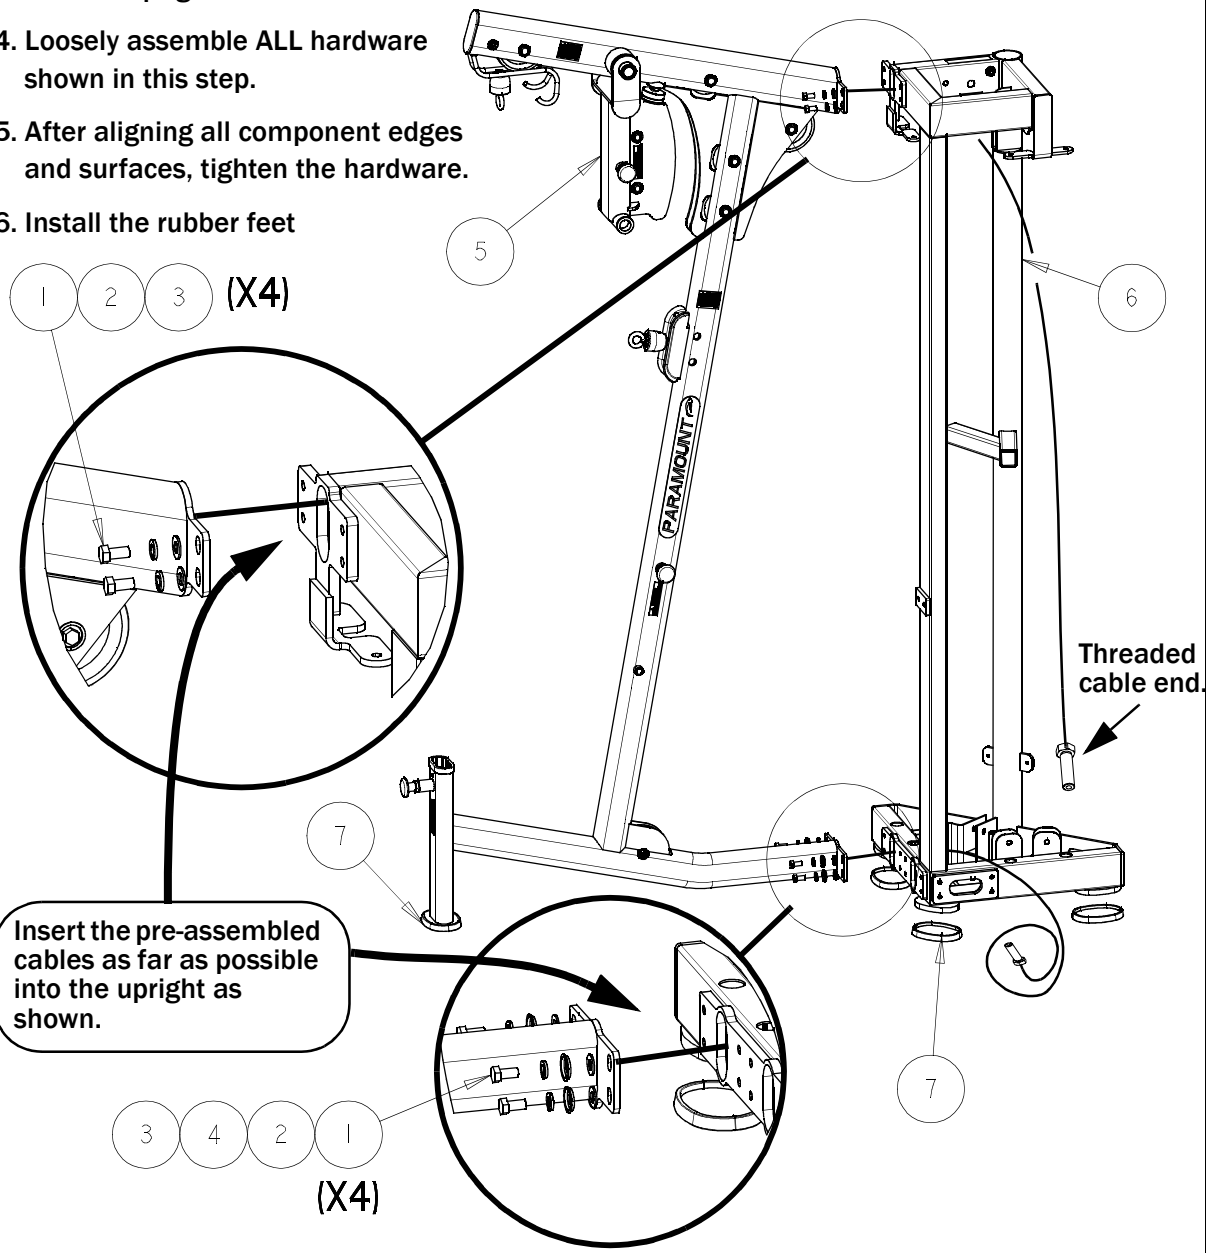

## STEP 2: ASSEMBLE THE PADS

1. Loosely assemble ALL hardware shown in this step.
2. After aligning all component edges and surfaces, tighten the hardware.
3. Be sure that both the Seat pad and Back pad can adjust easily.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-446	SCREW, HEX, 3/8-16 X 1-1/4, GR 5, ZP	2
2	C-451	SCREW, HEX, 3/8-16 X 2-3/4, GR 5, ZP	1
3	C-452	SCREW, HEX, 3/8-16 X 3, GR 5, ZP	1
4	C-749	WASHER, LOCK, 3/8, ZINC	4
5	C-755	WASHER, FLAT, 1/2 USS, ZP	1
6	C-754C	WASHER, FLAT, 3/8 SAE, ZP	5
7	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	1
8	C-955A	BASE, BOLT COVER, 3/8	5
9	P04-1346	ASSY, BACK PAD FRAME	1
10	P04-1347	SEAT FRAME	1
11	P07-0143	SEAT PAD	1
12	P07-0150	BACK PAD	1
13	SHOULDER2	SCREW, SHOULDER, 1/2" X 3" LG	1

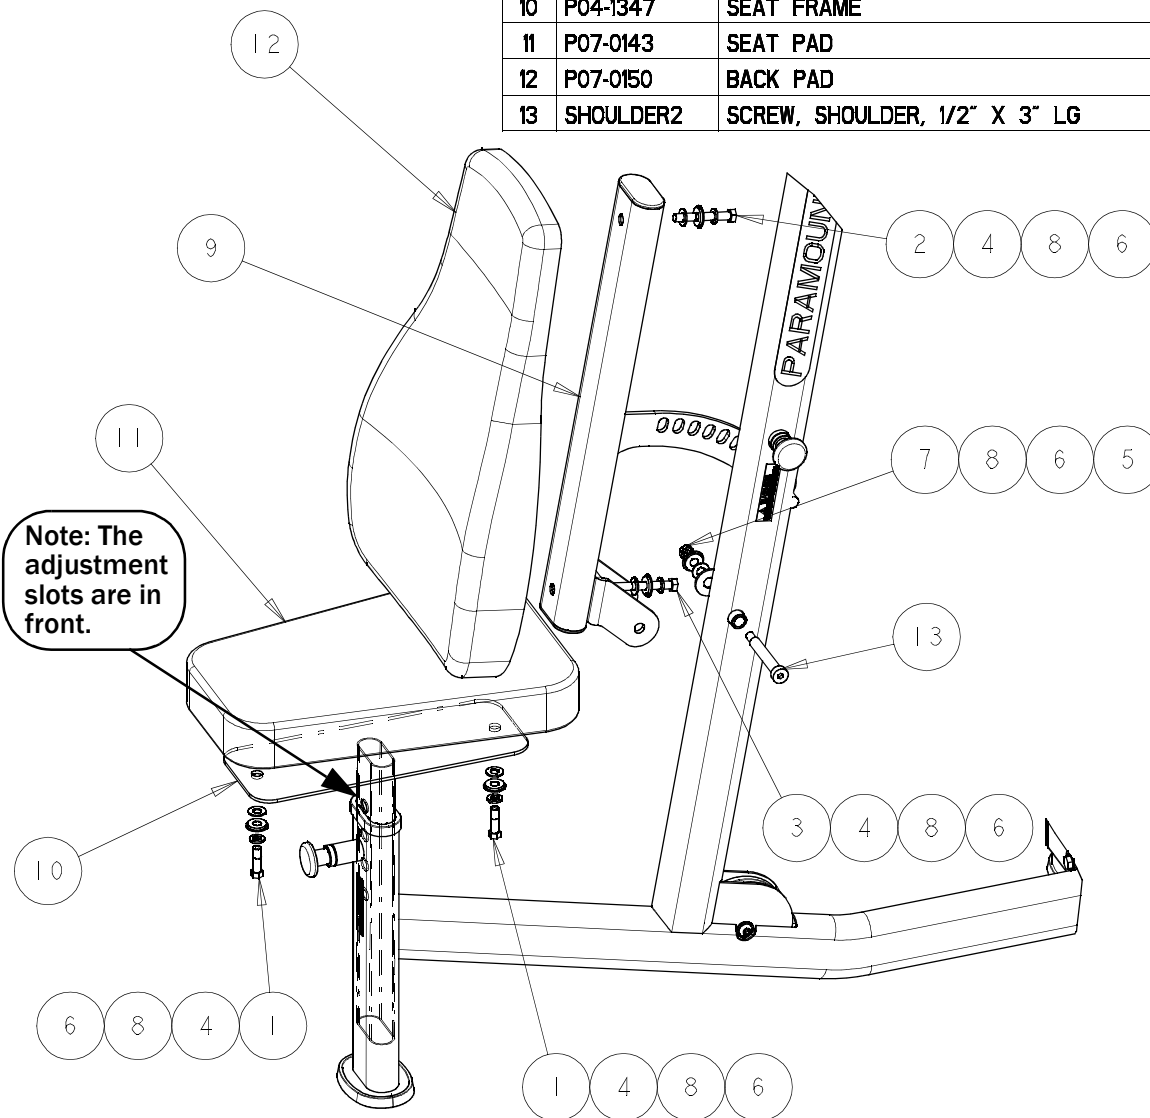

## STEP 3: ASSEMBLE THE PRESS ARM

1. To assemble the press arm, lift the arm so that the stop peg fits into the slot in the adjustment plate (as shown). Then rotate the arm down to line up the axle housings.



2. Insert the axle from either side of the machine. You may need a rubber mallet to install the axle.

3. After the axle is installed, tighten the four set screws on the press arm assembly.

4. Make sure arm can adjust easily.


ITEM	PART NO.	DESCRIPTION	QTY
1	P03-0889	AXLE, PRESS ARM	1
2	P04-1343	ASSY, PRESS ARM	1

Tighten the four set screws after installation.

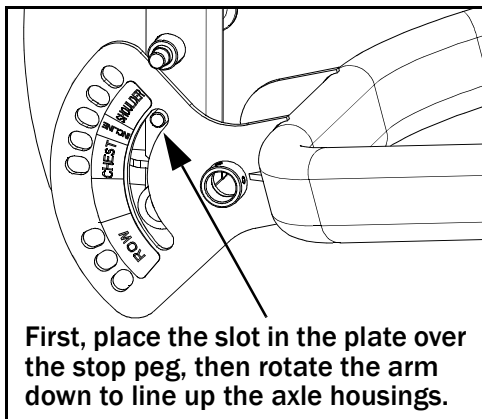


### TO INSTALL ARM

Installation may require two people.

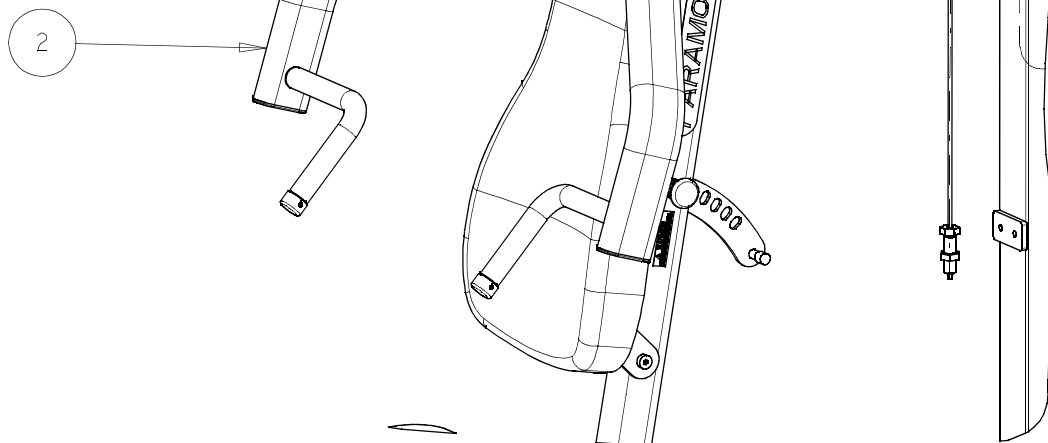

## STEP 4: INSTALL CHEST PRESS CABLE

1. Shown on this page is the general routing of the Chest Press cable (P13-0167). The following pages show sections in greater detail.

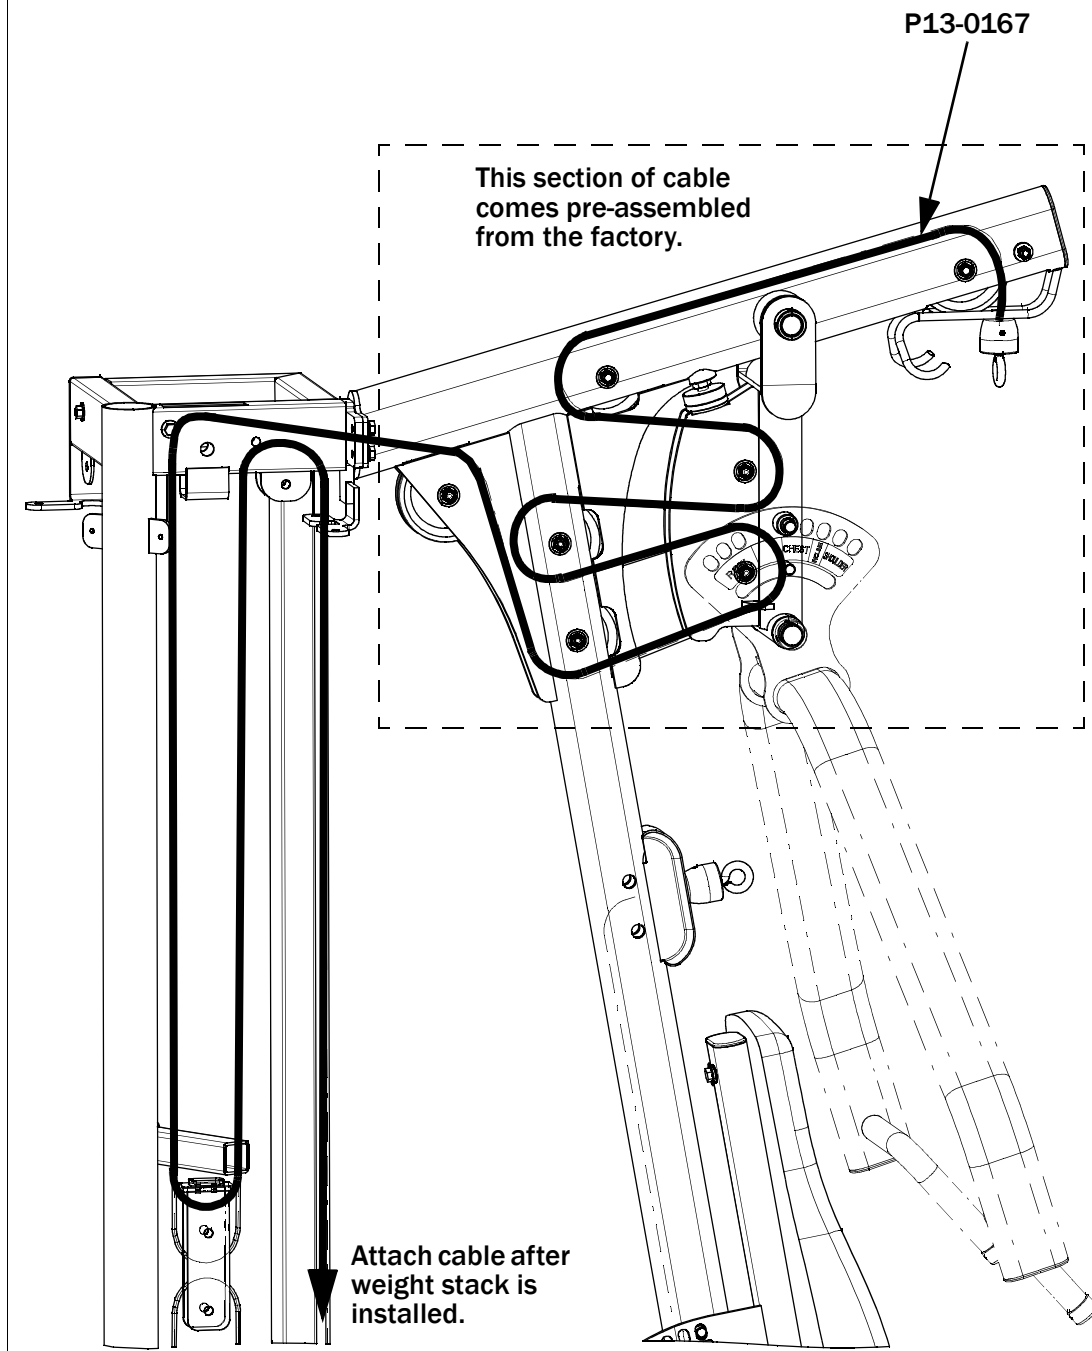


## STEP 4: INSTALL CHEST PRESS CABLE

1. Route the Chest Press cable as shown.
2. Install the pulleys and associated hardware as you go along.
3. Make sure the cable and pulleys can move freely. The cables must not get routed around the cable retaining bolts.


ITEM	PART NO.	DESCRIPTION	QTY
1	B_900A	PULLEY, 4-1/2", 3/16" CABLE	1
2	B_901	PULLEY, 3-1/2"	1
3	C-448	HEX, 3/8-16 X 1-3/4, GR 5, ZP	1
4	C-453	SCREW, HEX, 3/8-16 X 2, GR 5, ZP	2
5	C-754C	WASHER, FLAT, 3/8 SAE, ZP	4
6	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	3
7	MCP05005	BUSHING, PULLEY 2	2
8	P04-1365	ASSY, FLOATING PULLEY	1

### IMPORTANT !

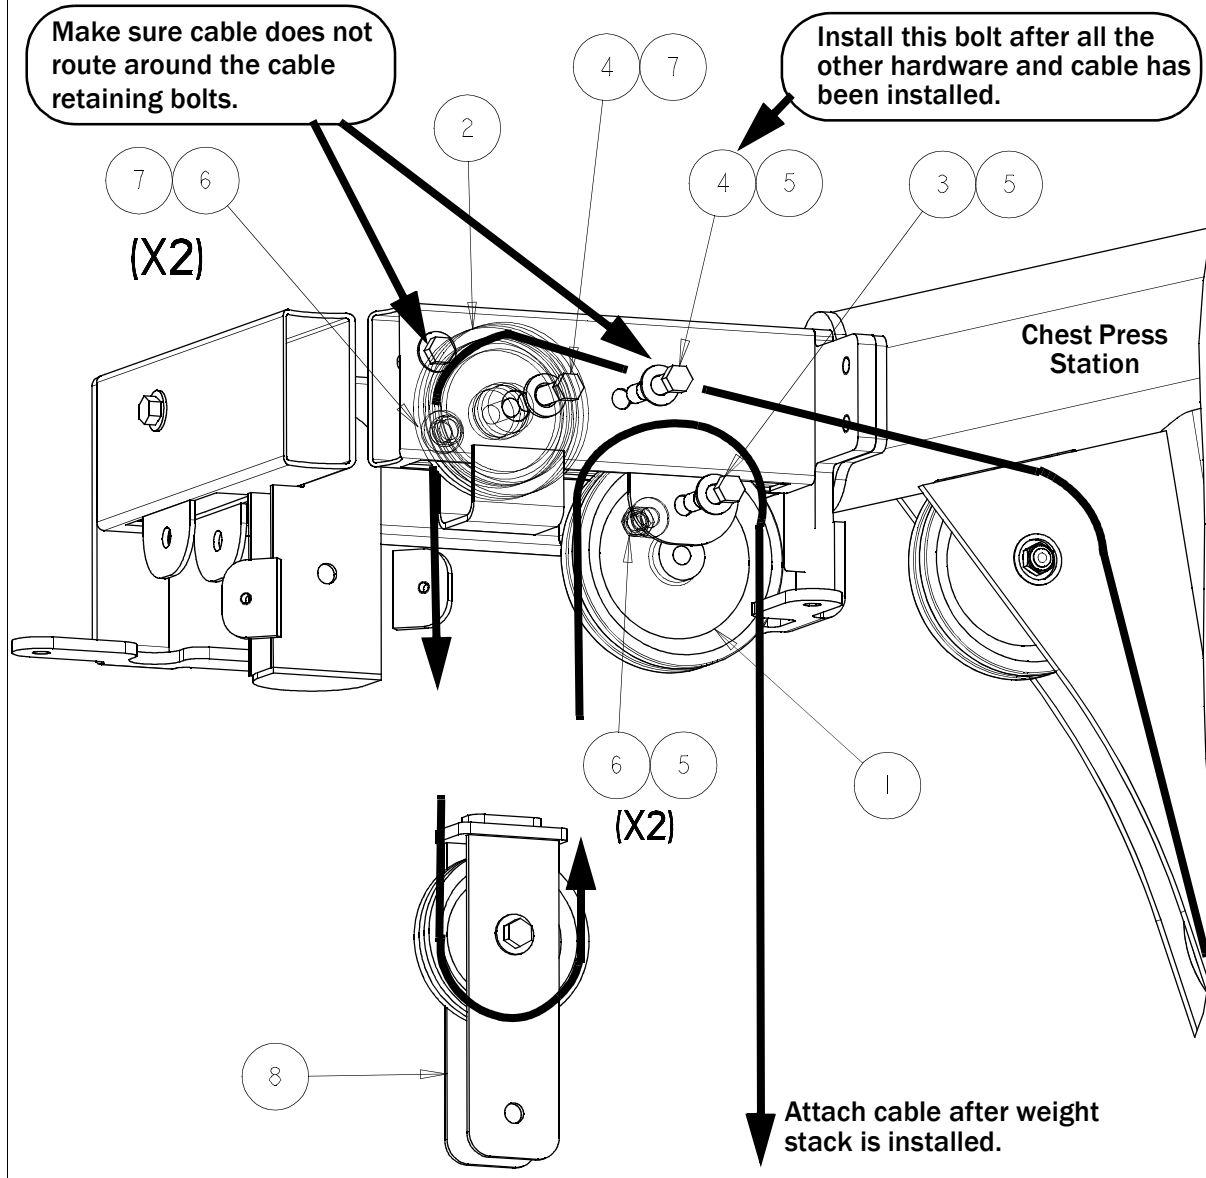

## STEP 5: INSTALL THE LOW PULLEY CABLE

1. Shown on this page is the general routing of the Low Pulley cable (P13-0169). The following pages show sections in greater detail.
2. The cable will be pre-installed into the chest press station but will need to be routed through the upright and out the Low Pulley.

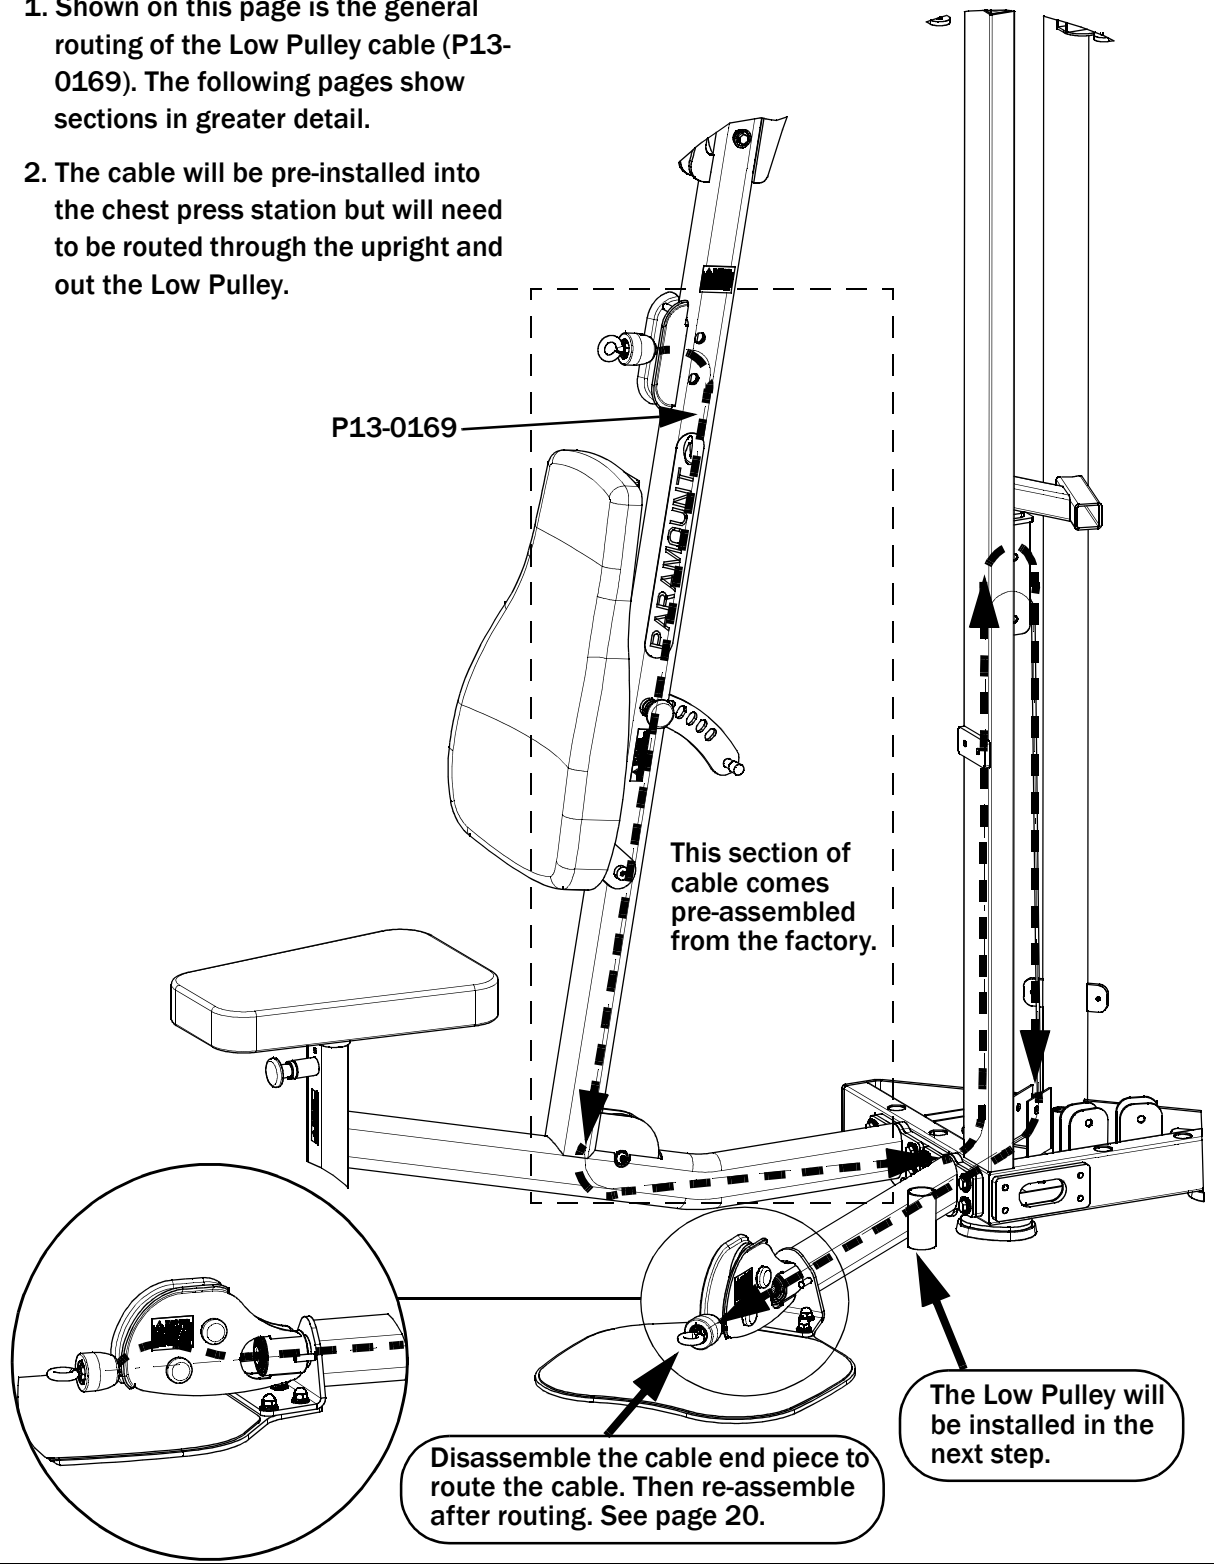


## STEP 5: INSTALL THE LOW PULLEY CABLE

1. Route the Low Pulley cable as shown.
2. Install the pulleys and associated hardware as you go along.
3. Make sure the cable and pulleys can move freely.

### COMPONENTS REQUIRED

ITEM	PART NO.	DESCRIPTION	QTY
1	B.901	PULLEY, 3-1/2"	3
2	C-448	HEX, 3/8-16 X 1-3/4, GR 5, ZP	3
3	C-754C	WASHER, FLAT, 3/8 SAE, ZP	6
4	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	3

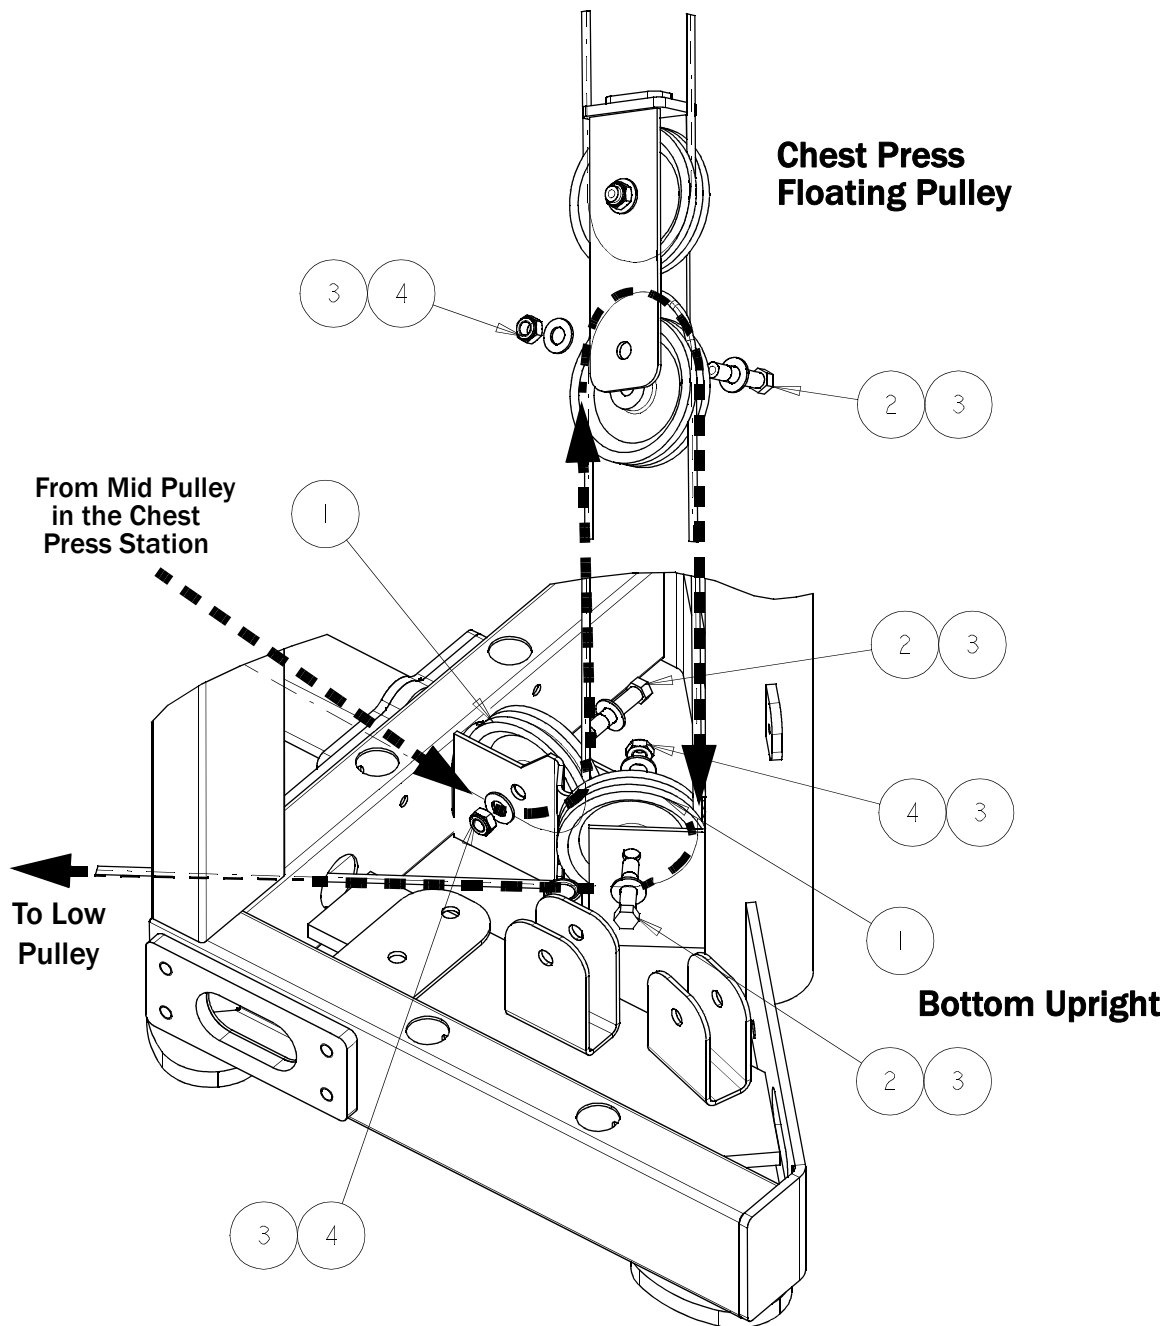



## STEP 5: INSTALL THE LOW PULLEY CABLE


1. Route the cable out the bottom of the upright. Attach the pre-installed wire tie to the cable bolt by wrapping it around the bolt threads, and pull the cable through the Low Pulley tube.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-444	SCREW, HEX, 3/8-16 X 3/4, GR 5, ZP	4
2	C-749	WASHER, LOCK, 3/8, ZINC	4
3	C-754C	WASHER, FLAT, 3/8 SAE, ZP	4
4	C-955A	BASE, BOLT COVER, 3/8	4
5	P04-1348	ASSY, LOW PULLEY	1

2. Assemble the Low Pulley weldment as shown.


3. After aligning all the edges, tighten the hardware.

4. Assemble the cable end piece as shown on the following page.

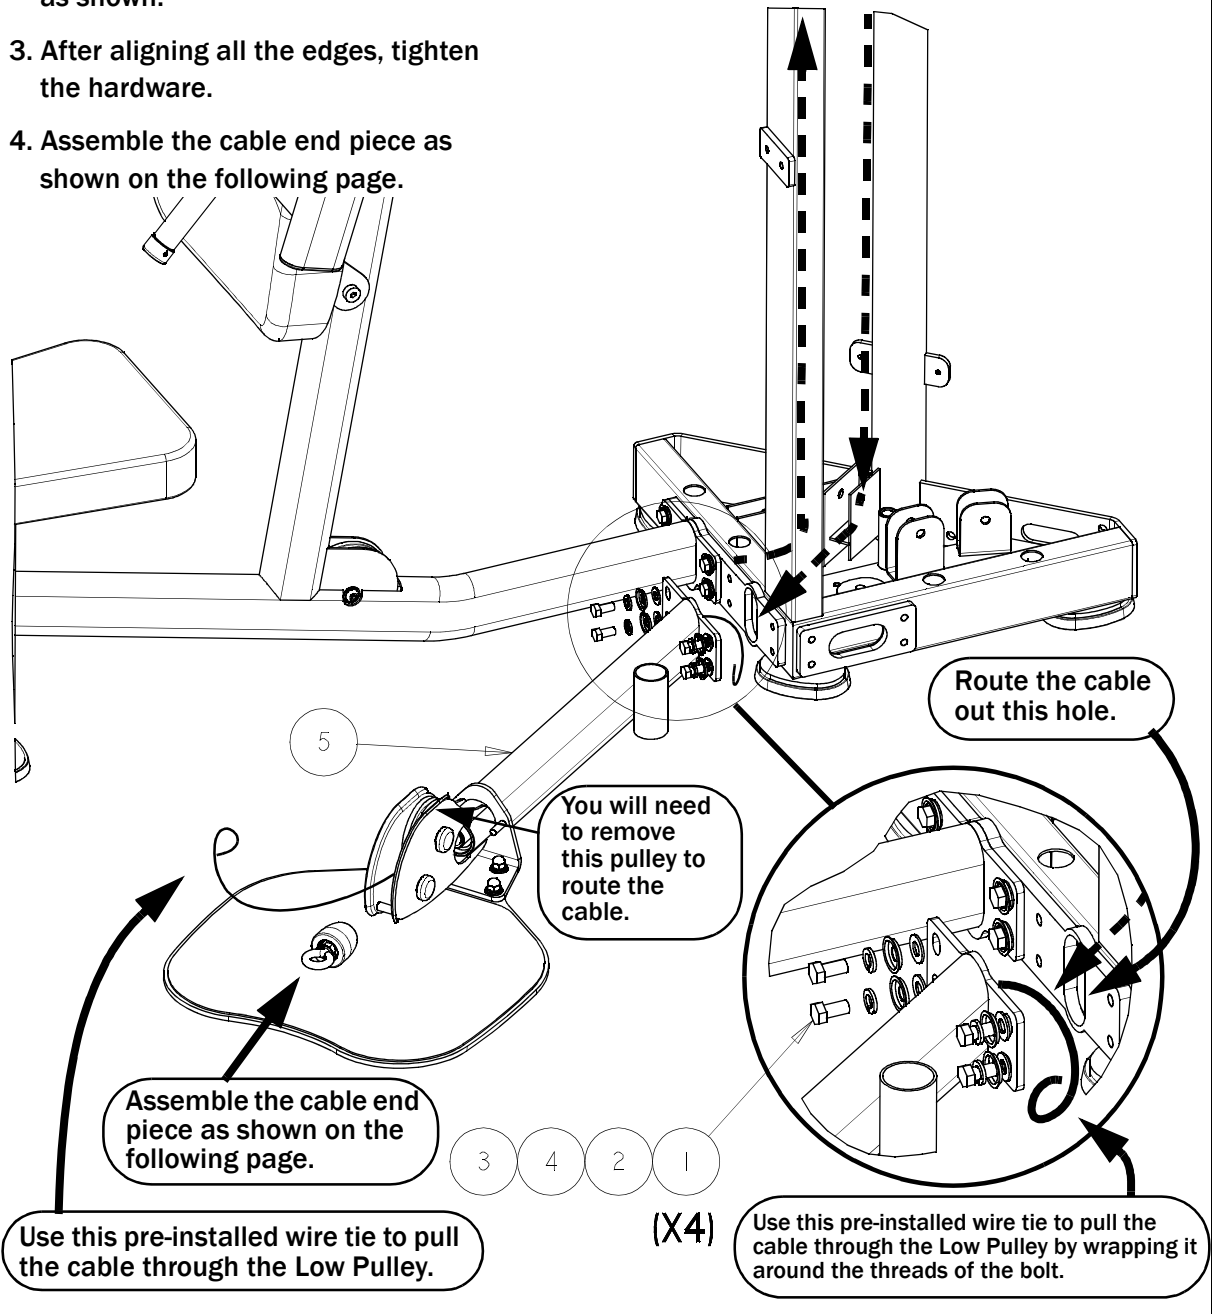

## STEP 5: INSTALL THE LOW PULLEY CABLE

1. Disassemble the cable end piece as shown below.
2. Route the Low Pulley cable as shown on page 17 through 19.
3. Assemble the cable end piece as shown below.
4. After routing the cable through the machine, add the lock washer and star toothed washer then thread the cable bolt into the plastic end piece and tighten it.

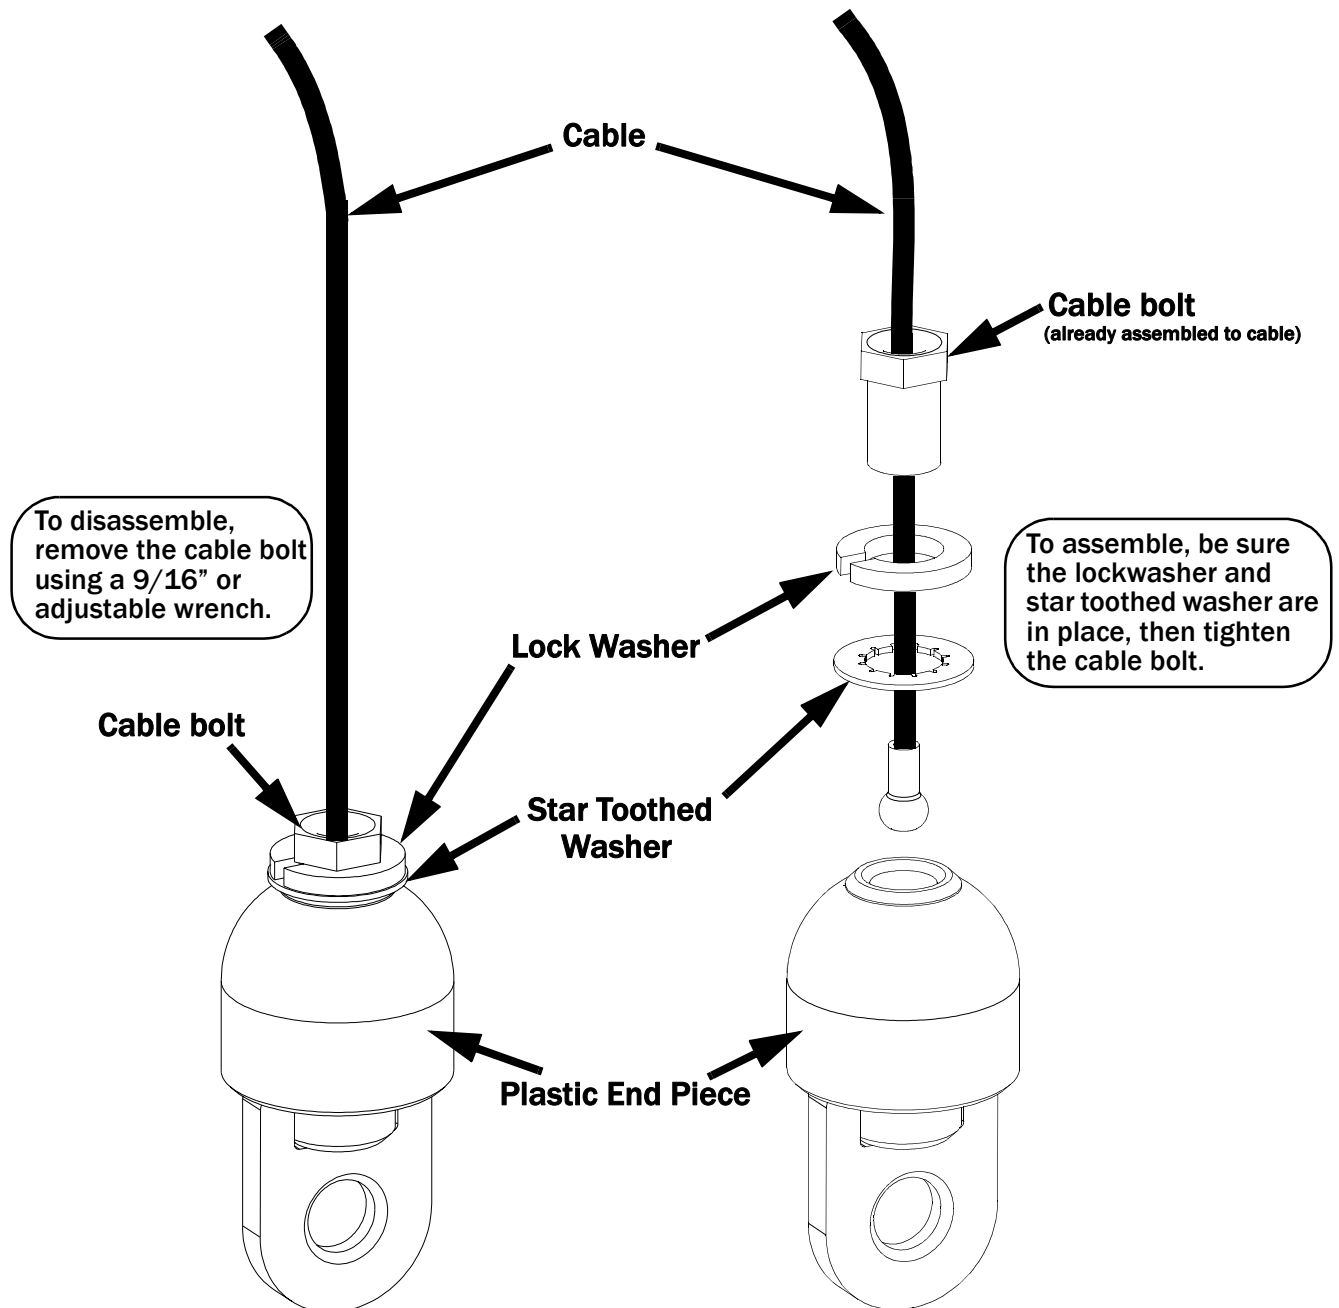


## STEP 6: ASSEMBLE THE LEG EXT/CURL MAIN FRAME

1. Loosely assemble ALL hardware shown in this step. DO NOT TIGHTEN THE HARDWARE.

2. Assemble rubber foot.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-444	SCREW, HEX, 3/8-16 X 3/4, GR 5, ZP	4
2	C-749	WASHER, LOCK, 3/8, ZINC	4
3	C-754C	WASHER, FLAT, 3/8 SAE, ZP	4
4	C-955A	BASE, BOLT COVER, 3/8	4
5	P04-1351	ASSY, SEAT FRAME	1
6	S-550	FOOT, MOLDED	1

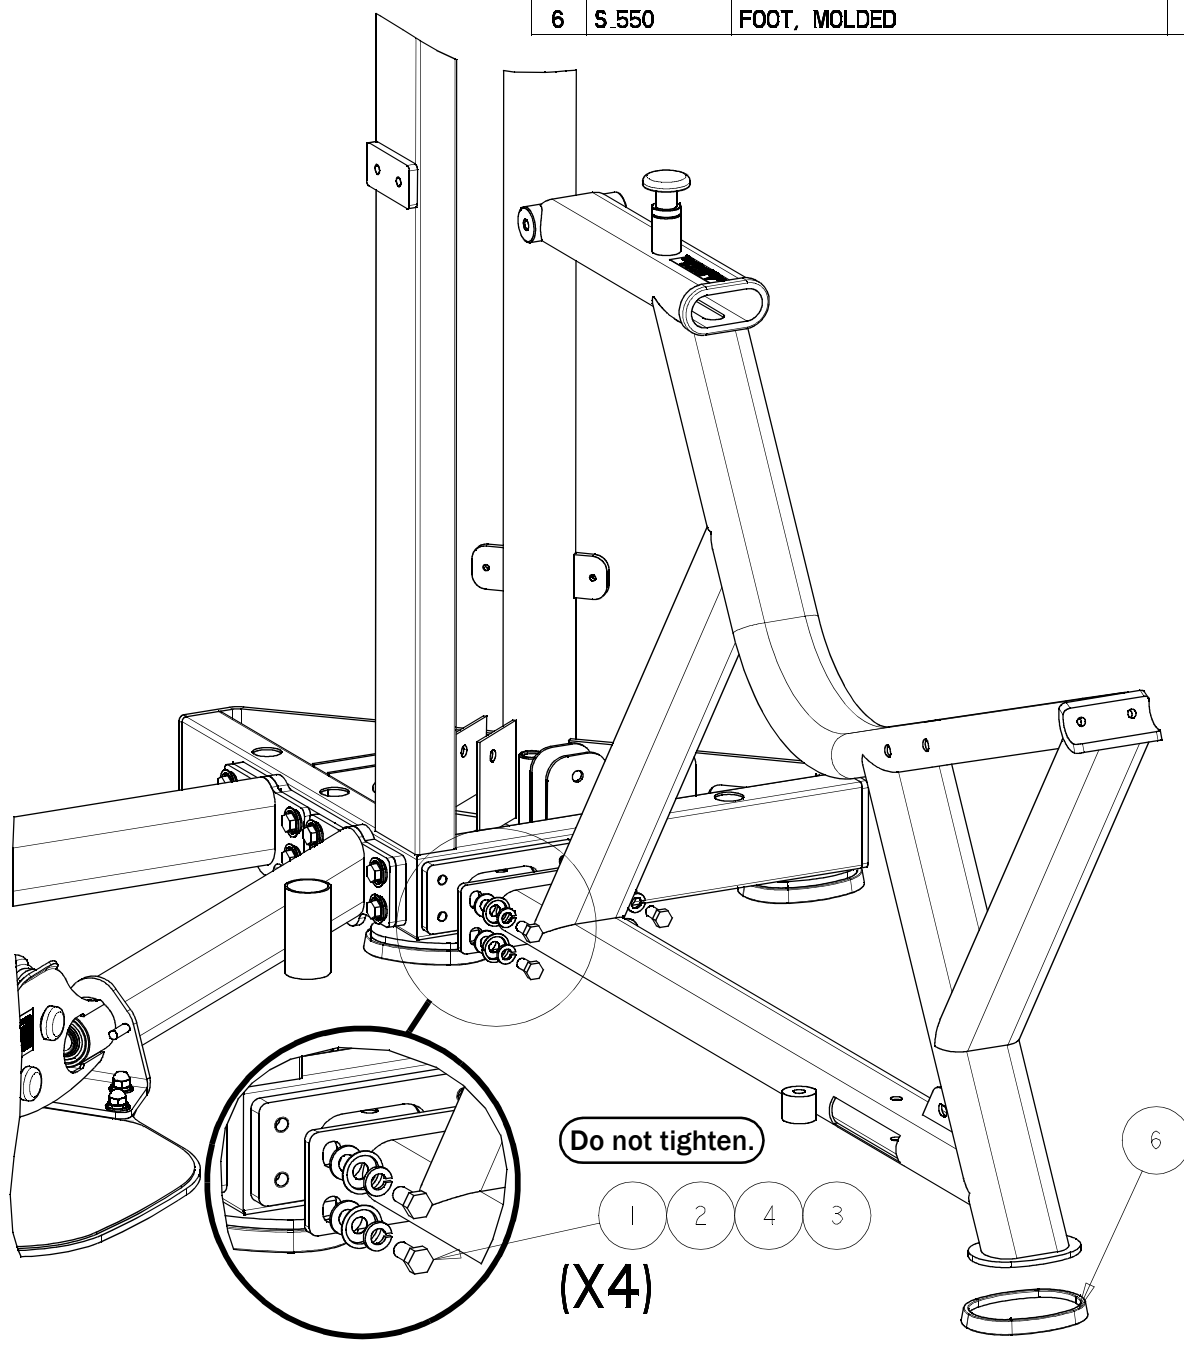


## STEP 7: ASSEMBLE THE LEG EXT/CURL FRONT FRAME

1. Loosely assemble ALL hardware shown in this step.

2. After aligning all component edges and surfaces, tighten the hardware. Also tighten the hardware from the previous step.

3. Assemble the rubber foot.

ITEM	PART NO.	DESCRIPTION	QTY
1	BHCS-3EX2	SCREW, BHCS, 3/8-16 X 2	2
2	C-448	HEX, 3/8-16 X 1-3/4, GR 5, ZP	1
3	C-678	SCREW, BHCS, 3/8-16 X 1	1
4	C-749	WASHER, LOCK, 3/8, ZINC	3
5	C-754C	WASHER, FLAT, 3/8 SAE, ZP	3
6	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	1
7	C.955A	BASE, BOLT COVER, 3/8	1
8	CRVD-WSHR	WASHER, CURVED, 3/8	2
9	P04-1352	ASSY, FRONT FRAME	1
10	S.550	FOOT, MOLDED	1

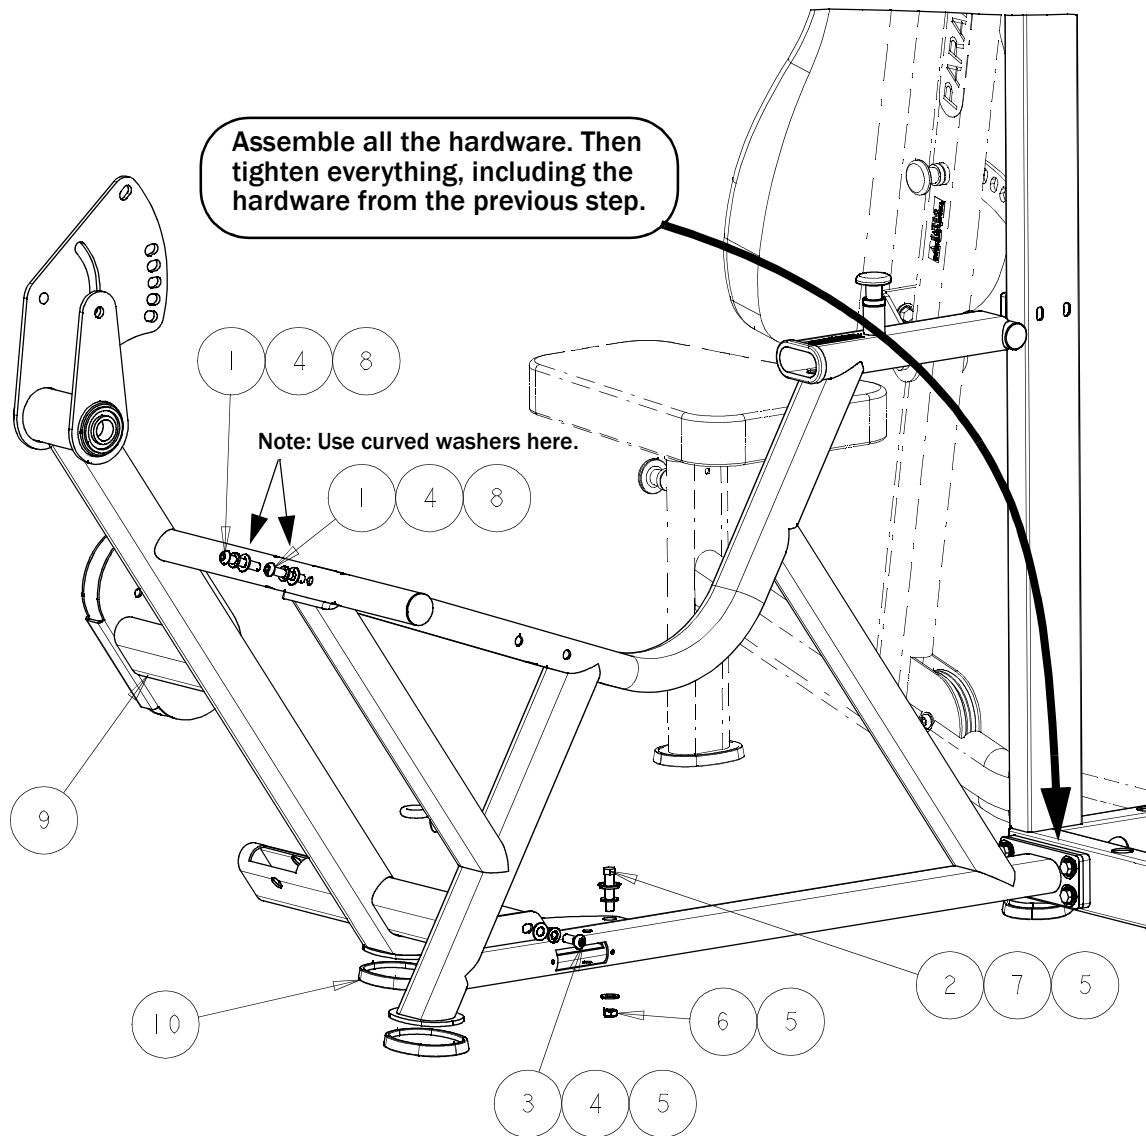


## STEP 8: ASSEMBLE THIGH PAD

1. Insert the Axle into the Thigh Pad Frame and then position it on the frame.

2. Insert the bolt through both the frame and the axle, then assemble and tighten the hardware.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-755	WASHER, FLAT, 1/2 USS, ZP	1
2	C-766	NUT, NYLOCK, 1/2-13, JAM, ZINC	1
3	C-669B	SCREW, FLAT HD, 1/2-13 X 5	1
4	P03-0890	AXLE	1
5	P04-1355	ASSY, THIGH PAD FRAME	1

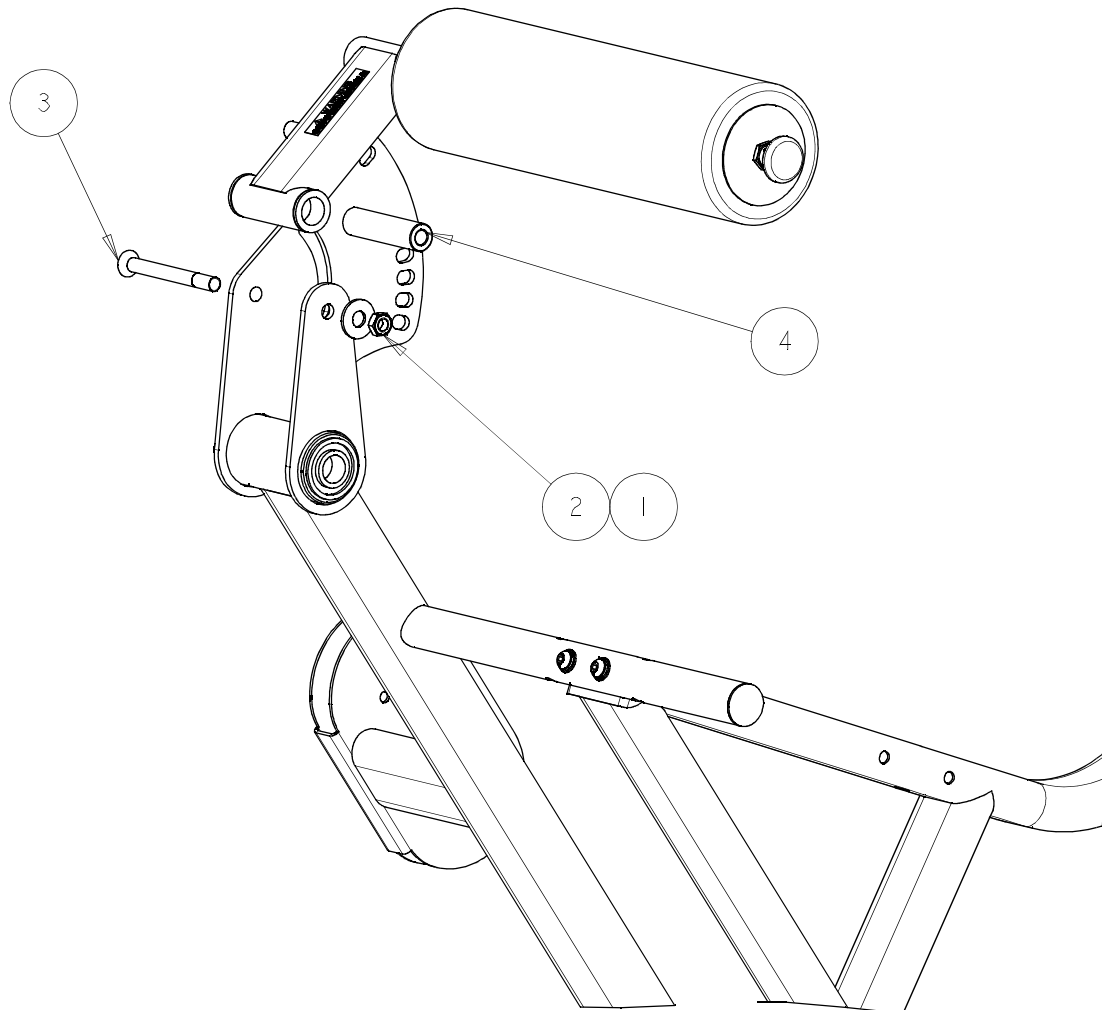


## STEP 9: ASSEMBLE THE ADJUSTMENT ARM

1. Assemble the Adjustment Cam and the Adjustment Arm as shown.

2. Secure the components in place using the 1" threaded collar. Tighten the collar enough so that the Cam and Arm can move freely and independently from each other. Then tighten the screw in the collar.

3. Assemble the Ankle Pad as shown. Be sure the Pad Frame can rotate freely. Then tighten the screw in the collar.


ITEM	PART NO.	DESCRIPTION	QTY
1	CLLR1	1" THREADED COLLAR	1
2	CLLR2	COLLAR, CLAMPING, 1" I.D.	1
3	P04-1353	ASSY, ADJUSTMENT ARM	1
4	P04-1354	ASSY, ANKLE PAD FRAME	1
5	P04-1356	ADJUSTMENT CAM, AXLE ASSY	1

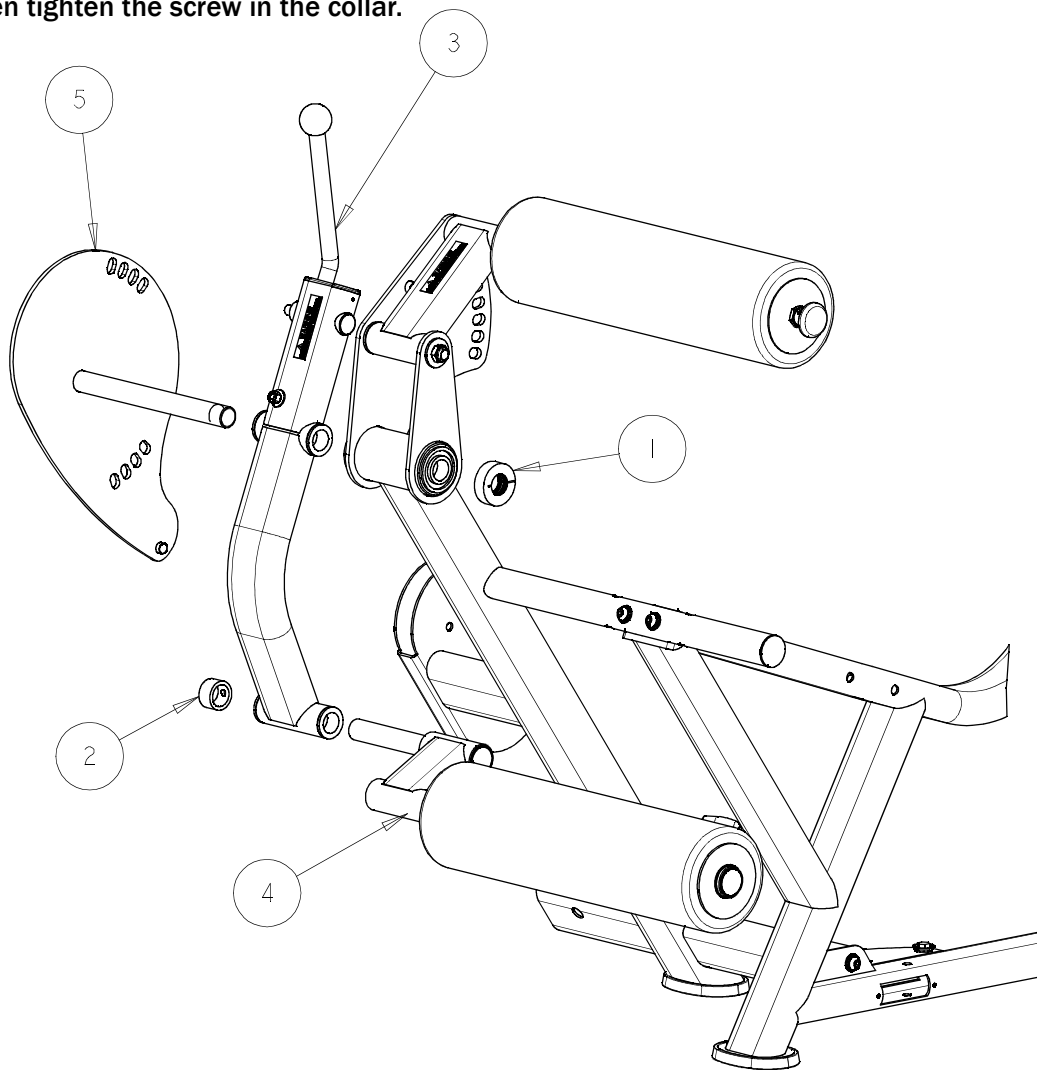

# STEP 10: ASSEMBLE THE PADS AND HANDLES

1. Assemble the Back Pad Frame and Back Pad as shown.
2. Loosely assemble the Handle to the frame using the 4" bolts.
3. Assemble the Seat Pad and then tighten all the hardware.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-451	SCREW, HEX, 3/8-16 X 2-3/4, GR 5, ZP	4
2	C-452	SCREW, HEX, 3/8-16 X 3, GR 5, ZP	1
3	C-455	SCREW, HEX, 3/8-16 X 4, GR 5, ZP	2
4	C-749	WASHER, LOCK, 3/8, ZINC	5
5	C-754C	WASHER, FLAT, 3/8 SAE, ZP	7
6	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	2
7	C-955A	BASE, BOLT COVER, 3/8	9
8	CRVD-WSHR	WASHER, CURVED, 3/8	2
9	P04-1358	ASSY, BACK PAD FRAME	1
10	P04-1360	ASSY, HANDLE	1
11	P07-0145	SEAT PAD	1
12	P07-0150	BACK PAD	1

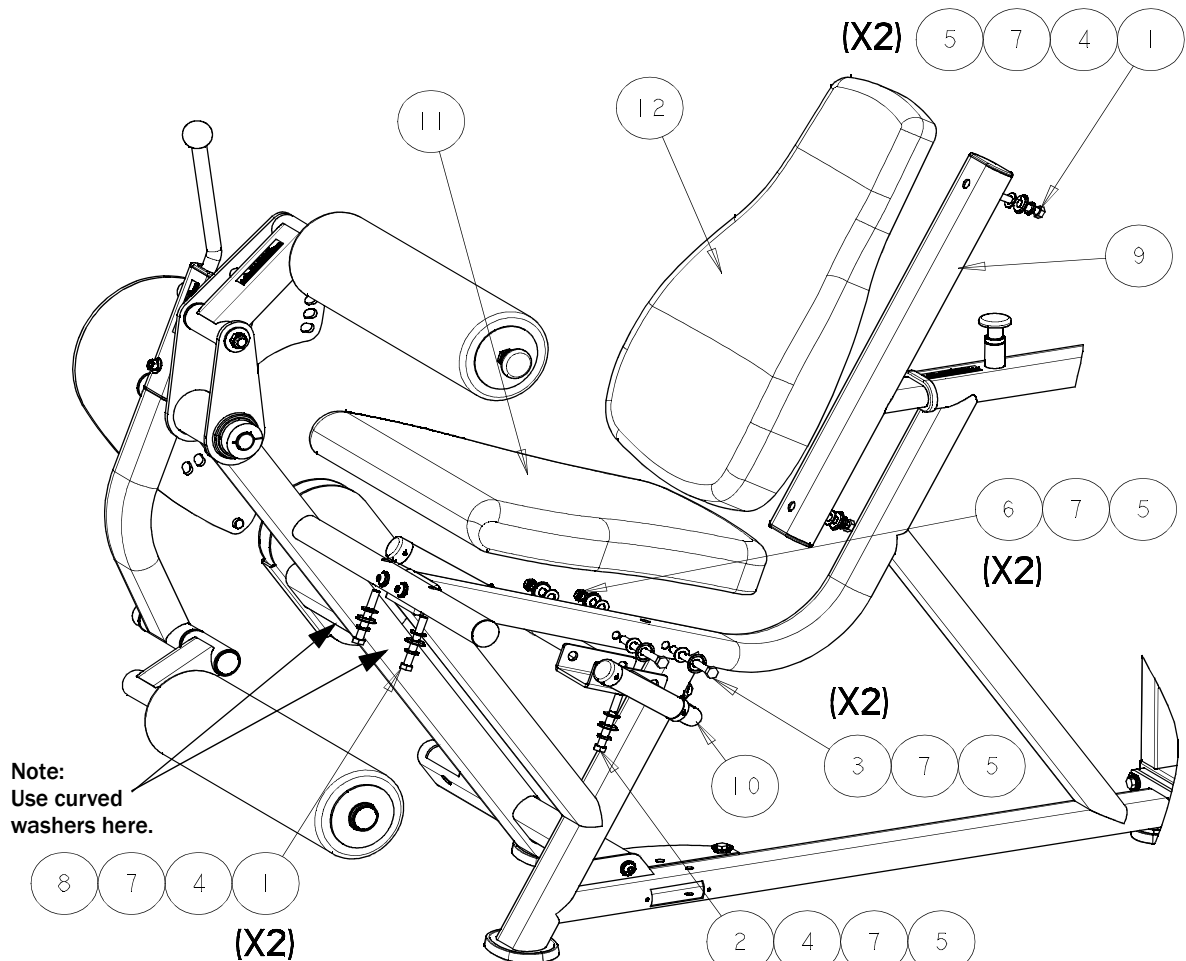



**If you have purchased the Leg Press station (MP2.5), please refer to the MP2.5 Leg Press Assembly Manual now for installation. Otherwise, continue with the installation on the following page.**

**When you have completed the Leg Press Installation, return to this manual on page 29.**

**! Note: Be sure to check which weight stack is assigned to each station. Each weight stack consists of either (Qty. 16) - 10 lb. weight plates OR (Qty. 16) - 15 lb. weight plates.**



# STEP 11: INSTALL LEG EXT/CURL CABLE

1. This step is for use only with the MP 2.0. If you have purchased the MP 2.5, please refer to the MP 2.5 manual to install this cable and the Leg Press.


2. Shown on this page is the general routing of the Leg Ext/Curl cable. The following pages show sections in greater detail.

3. Feed the cable starting from the Upright frame then out to the Leg Extension / Curl station.

## IMPORTANT !

This step is for use only with the MP 2.0. If you have purchased the MP 2.5, please refer to the MP 2.5 manual to install this cable and the Leg Press.

ITEM	PART NO.	DESCRIPTION	QTY
1	P13-0170	CABLE, LE/LC	1

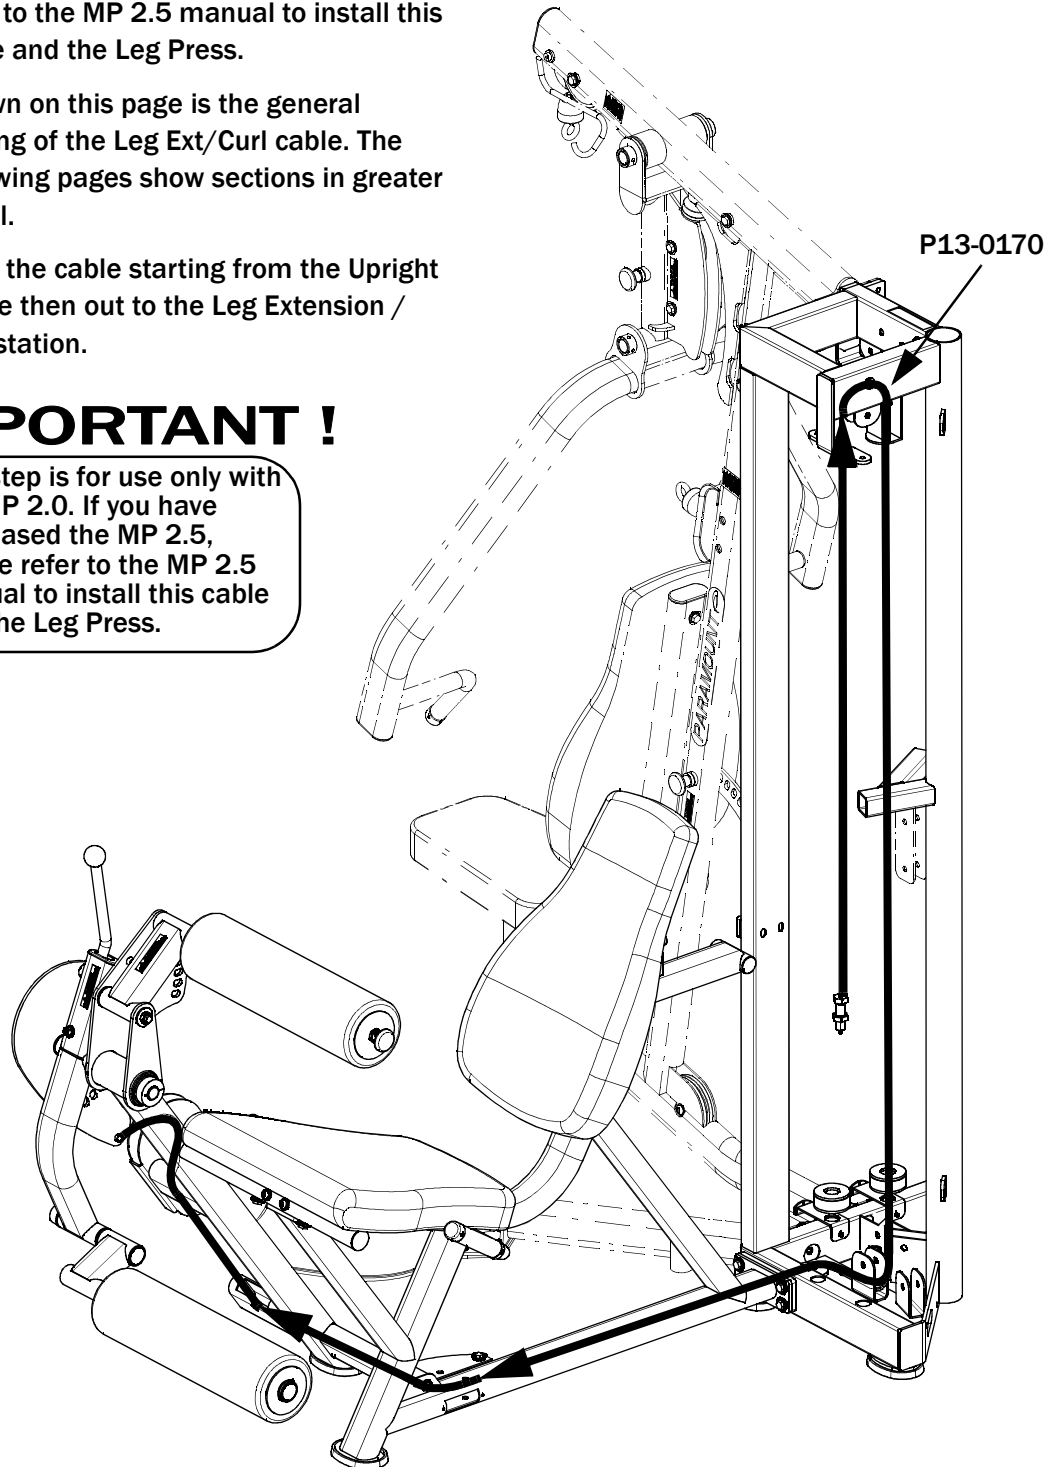


# STEP 11: INSTALL THE LEG EXT/CURL CABLE

1. Assemble the Pulleys, Hardware, and Cable as shown.
2. Install the pulleys and associated hardware as you go along.
3. Be sure the cable clears the retaining bolts and that the pulleys can rotate freely.

ITEM	PART NO.	DESCRIPTION	QTY
1	B-900A	PULLEY, 4-1/2", 3/16" CABLE	3
2	C-448	HEX, 3/8-16 X 1-3/4, GR 5, ZP	3
3	C-749	WASHER, LOCK, 3/8, ZINC	1
4	C-777	SCREW, SHOULDER, 3/8" X 1-1/4" LG.	1
5	C-754C	WASHER, FLAT, 3/8 SAE, ZP	5
6	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	2

## IMPORTANT !

This cable routing diagram is only for the MP 2.0. If you have purchased the MP 2.5, please refer to the MP 2.5 manual to install this cable and the Leg Press.

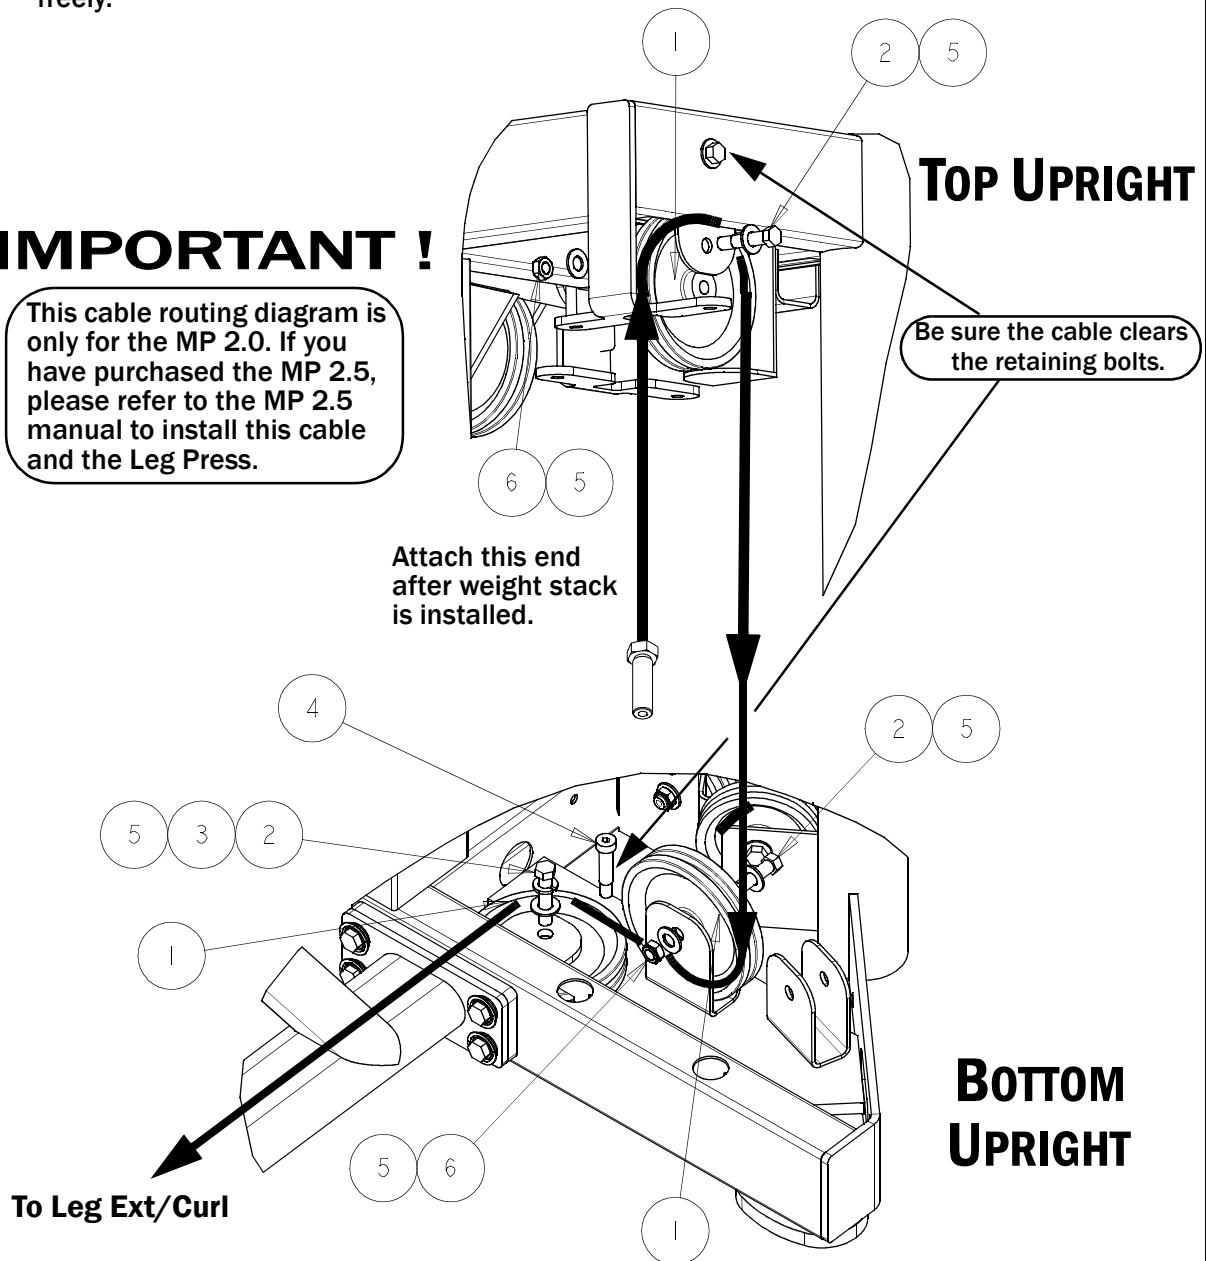


# STEP 11: INSTALL THE LEG EXT/CURL CABLE

1. Route the Leg Extension/Curl cable as shown.
2. Install the pulleys and associated hardware as you go along.
3. Be sure the cable clears the retaining bolts and that the pulleys can rotate freely.

## COMPONENTS REQUIRED

ITEM	PART NO.	DESCRIPTION	QTY
1	B_900A	PULLEY, 4-1/2", 3/16" CABLE	3
2	B_901	PULLEY, 3-1/2"	1
3	C-448	HEX, 3/8-16 X 1-3/4, GR 5, ZP	3
4	C-449	HEX, 3/8-16 X 2-1/4, GR 5, ZP	1
5	C-453	SCREW, HEX, 3/8-16 X 2, GR 5, ZP	1
6	C-749	WASHER, LOCK, 3/8, ZINC	2
7	C-754C	WASHER, FLAT, 3/8 SAE, ZP	9
8	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	6
9	C.955A	BASE, BOLT COVER, 3/8	9
10	MCP05005	BUSHING, PULLEY 2	2

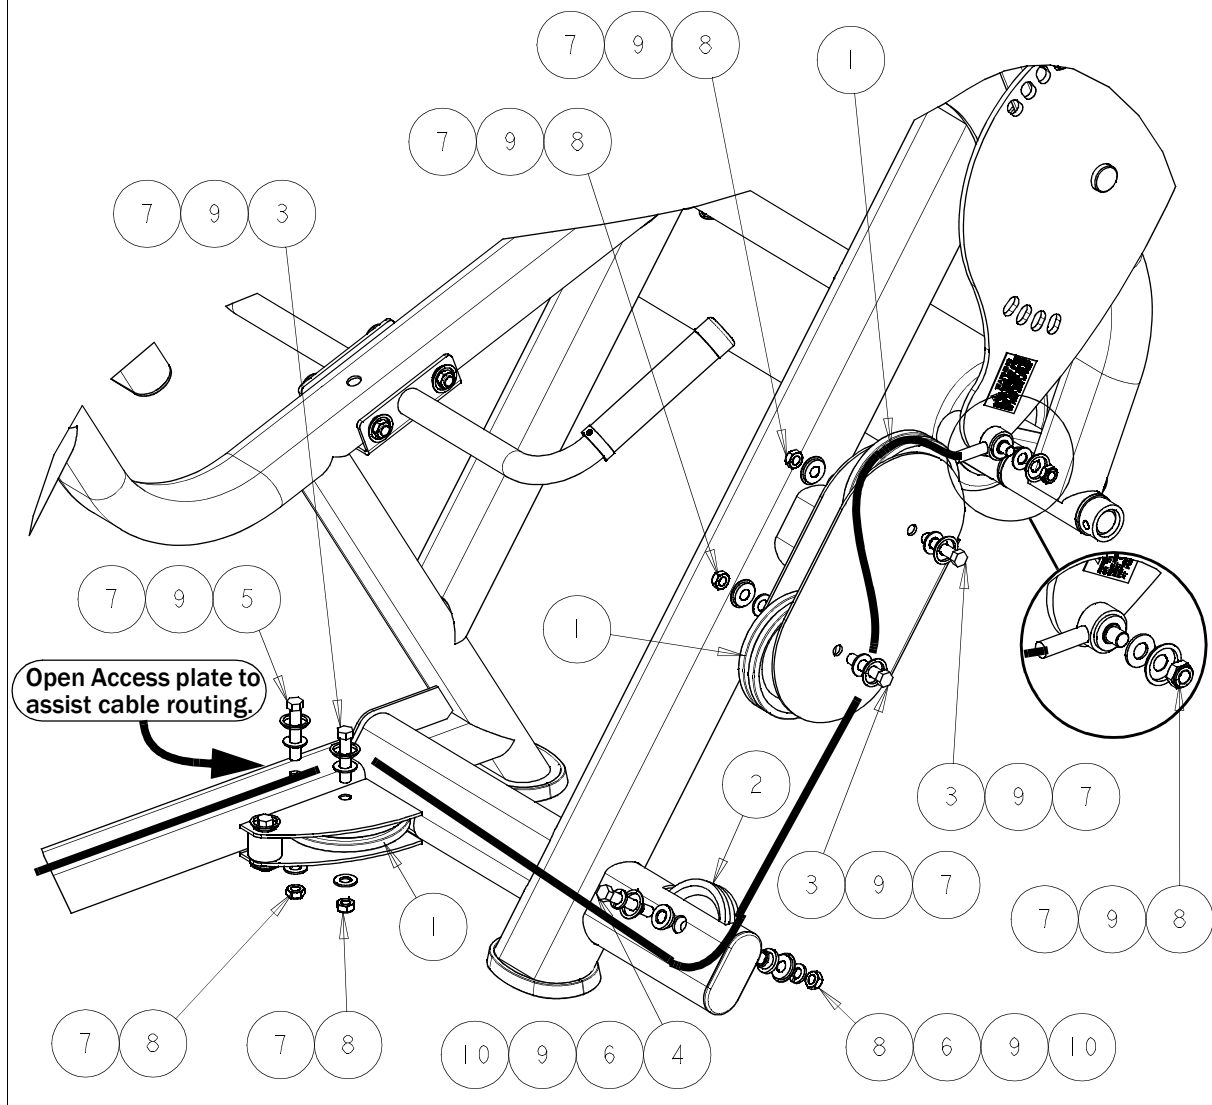

# STEP 12: INSTALL THE CHEST PRESS WEIGHT STACK


1. Be sure to assemble the shroud holders, washers and bumpers before adding weights.

2. Be sure to install the correct weight plate size for this station.

3. In order to install the weights, lean the guide rods out as shown.


4. Attach Chest Press Cable.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-757	WASHER, FLAT, 1 USS, ZINC	4
2	D-840	COLLAR, CLAMPING, 1" I.D.	2
3	MSC05050X	ASSY, CAP PLATE/SELECTOR BAR	1
4	P01-1816	ASSY, GUIDE ROD	2
5	P04-1361	SHROUD HOLDER	2
6	P06-0073	BUMPER, 1.062 I.D. X 1.5" HIGH	2
7	S-501	PLATE, 15#, 5" CL. W/BUSHING	16

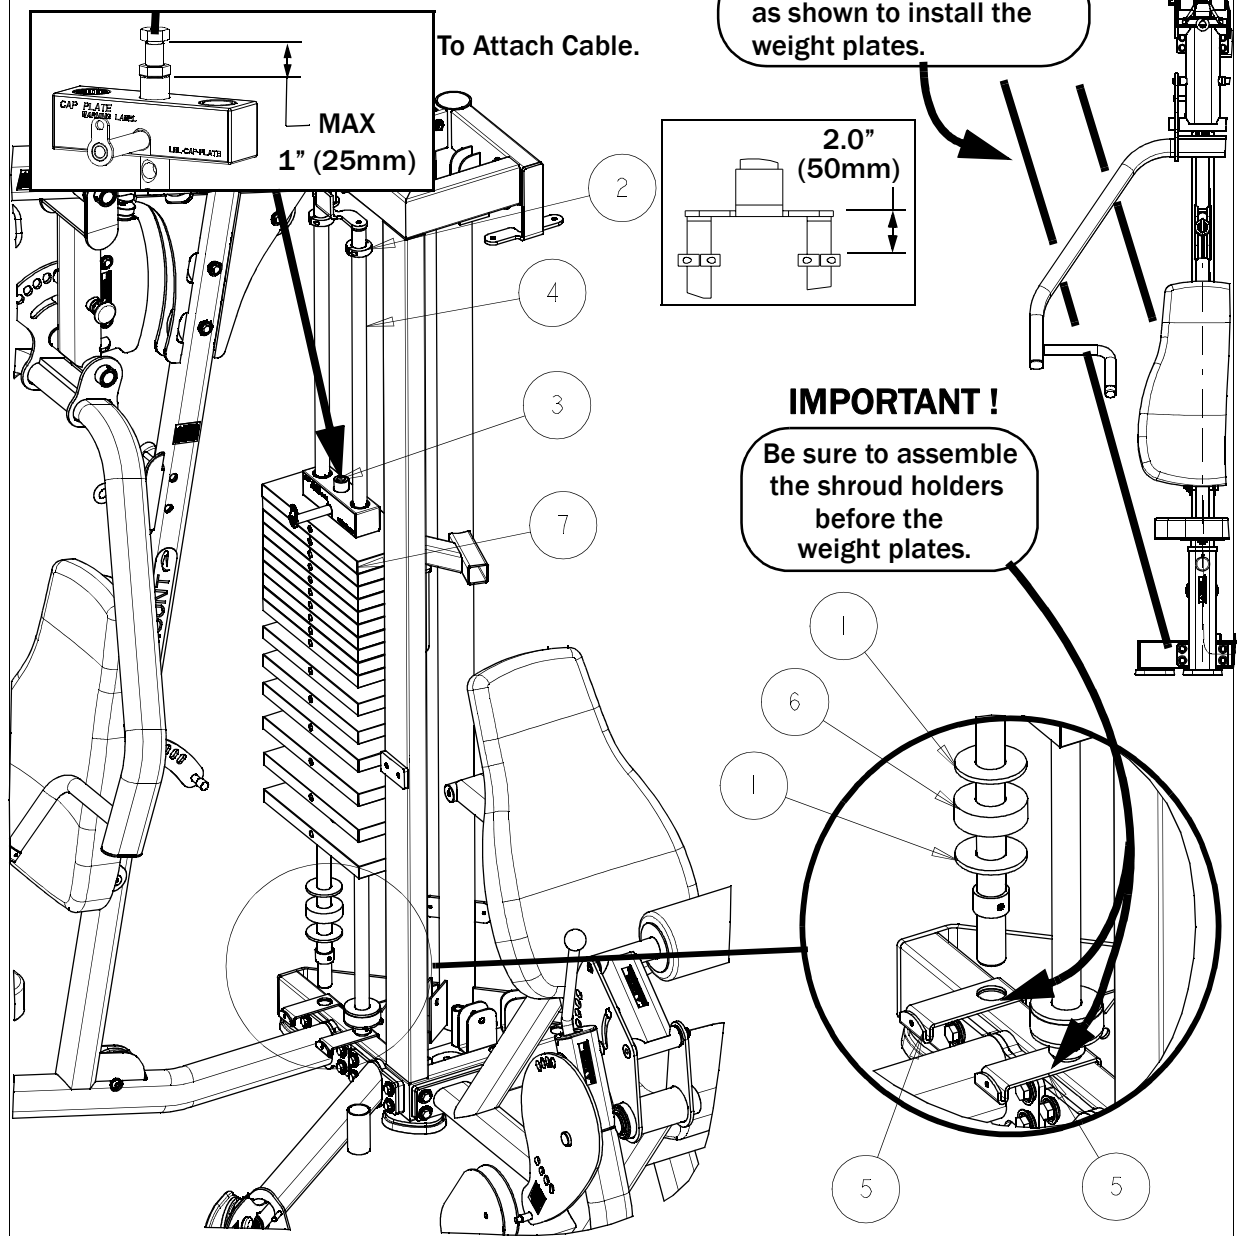


## STEP 12: INSTALL THE CHEST PRESS WEIGHT STACK

1. After installing the Chest Press weight stack, an adjustment of the Chest Press Arm Stop position may be needed. This adjustment will accommodate for any difference in cable length.
2. In order to adjust the press arm, first loosen the retaining nut.
3. Then rotate the Stop to move it up or down to achieve the proper cable tension. Tension the cable so that the weight stack selector pin can be easily inserted into each weight plate.
4. Finally, tighten the retaining nut.

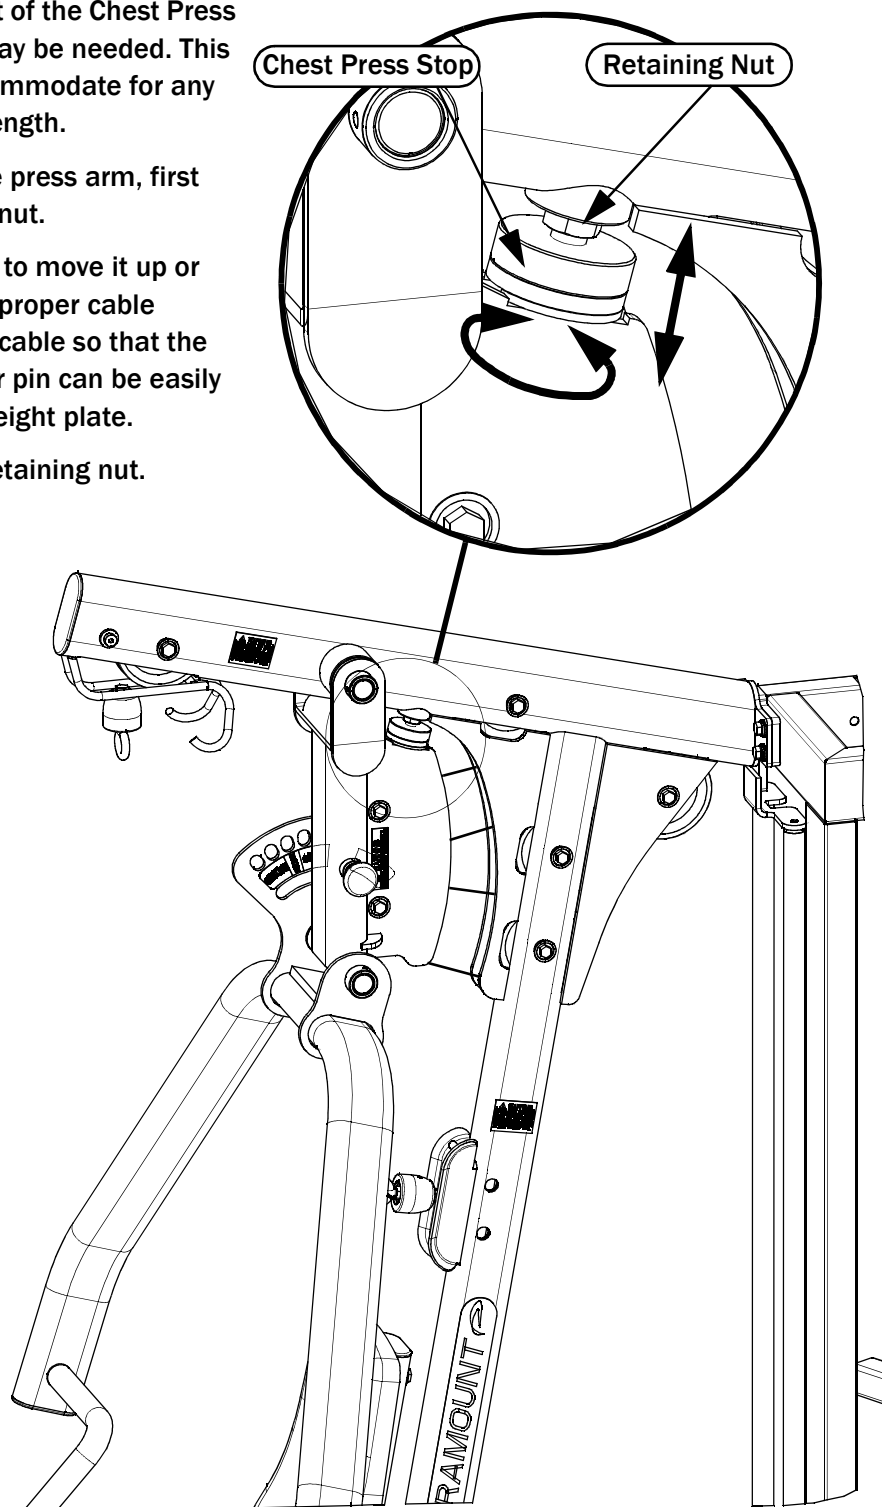

# STEP 13: INSTALL THE LEG EXT/CURL WEIGHT STACK

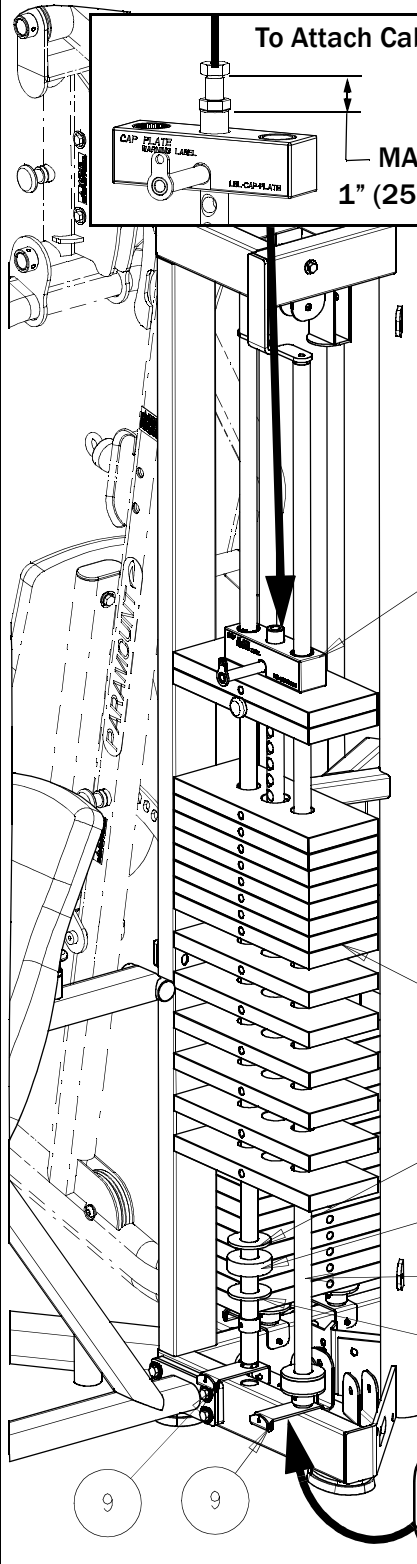

To Attach Cable.

MAX  
1" (25mm)

7

12

2

10

8

2


9

9


ITEM	PART NO.	DESCRIPTION	QTY
1	C-461	SCREW, HEX, 3/8-16 X 5-1/2,, GR 5, ZP	1
2	C-757	WASHER, FLAT, 1 USS, ZINC	4
3	C-754C	WASHER, FLAT, 3/8 SAE, ZP	1
4	C-766A	NUT, NYLOCK, 3/8", JAM, ZINC	1
5	C-955	CAP, BOLT COVER, 3/8	1
6	C-955A	BASE, BOLT COVER, 3/8	1
7	MSC05050X	ASSY, CAP PLATE/SELECTOR BAR	1
8	P01-1816	ASSY, GUIDE ROD	2
9	P04-1361	SHROUD HOLDER	2
10	P06-0073	BUMPER, 1.062 I.D. X 15" HIGH	2
11	PIN-SLV	SLEEVE, WGT STCK PIN	2
12	S-501	WGT PLATE, 10# OR 15#	16

**IMPORTANT !**

If you are using 10 lb. plates on this weight stack, pin two (2) plates for counter weight. If you are using 15 lb. plates on this stack, pin only one (1) plate.

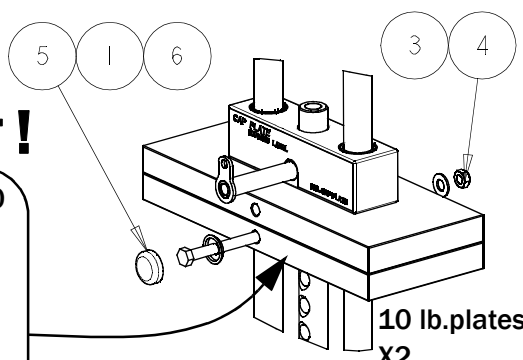


10 lb.plates  
X2

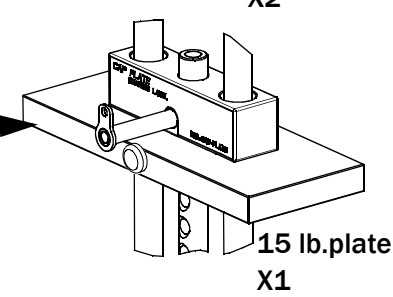

15 lb.plate  
X1

When using (1) 15 lb. plate, remove the unused sleeve from the selector bar using a hammer and punch.

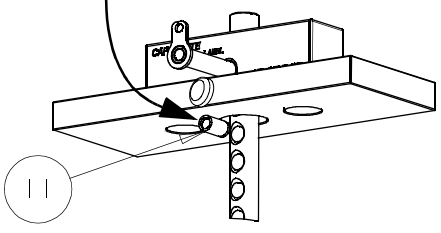


11

Be sure to assemble the shroud holders before the weight plates.

## STEP 14: ASSEMBLE THE FRONT SHROUD

1. Place the front shroud into the shroud holders at the base of the upright as shown.
2. Assemble the bolts that retain both the shroud and the guide rod.
3. Assemble the set screws on the bottom shroud holders.


ITEM	PART NO.	DESCRIPTION	QTY
1	C-445	SCREW, HEX, 3/8-16 X 1, GR 5, ZP	2
2	C-749	WASHER, LOCK, 3/8, ZINC	2
3	C-754C	WASHER, FLAT, 3/8 SAE, ZP	2
4	CP55-1032X1Q	SET SCREW, 10-32 X 1/4"	2
5	P04-1363	SHROUD, FRONT	1

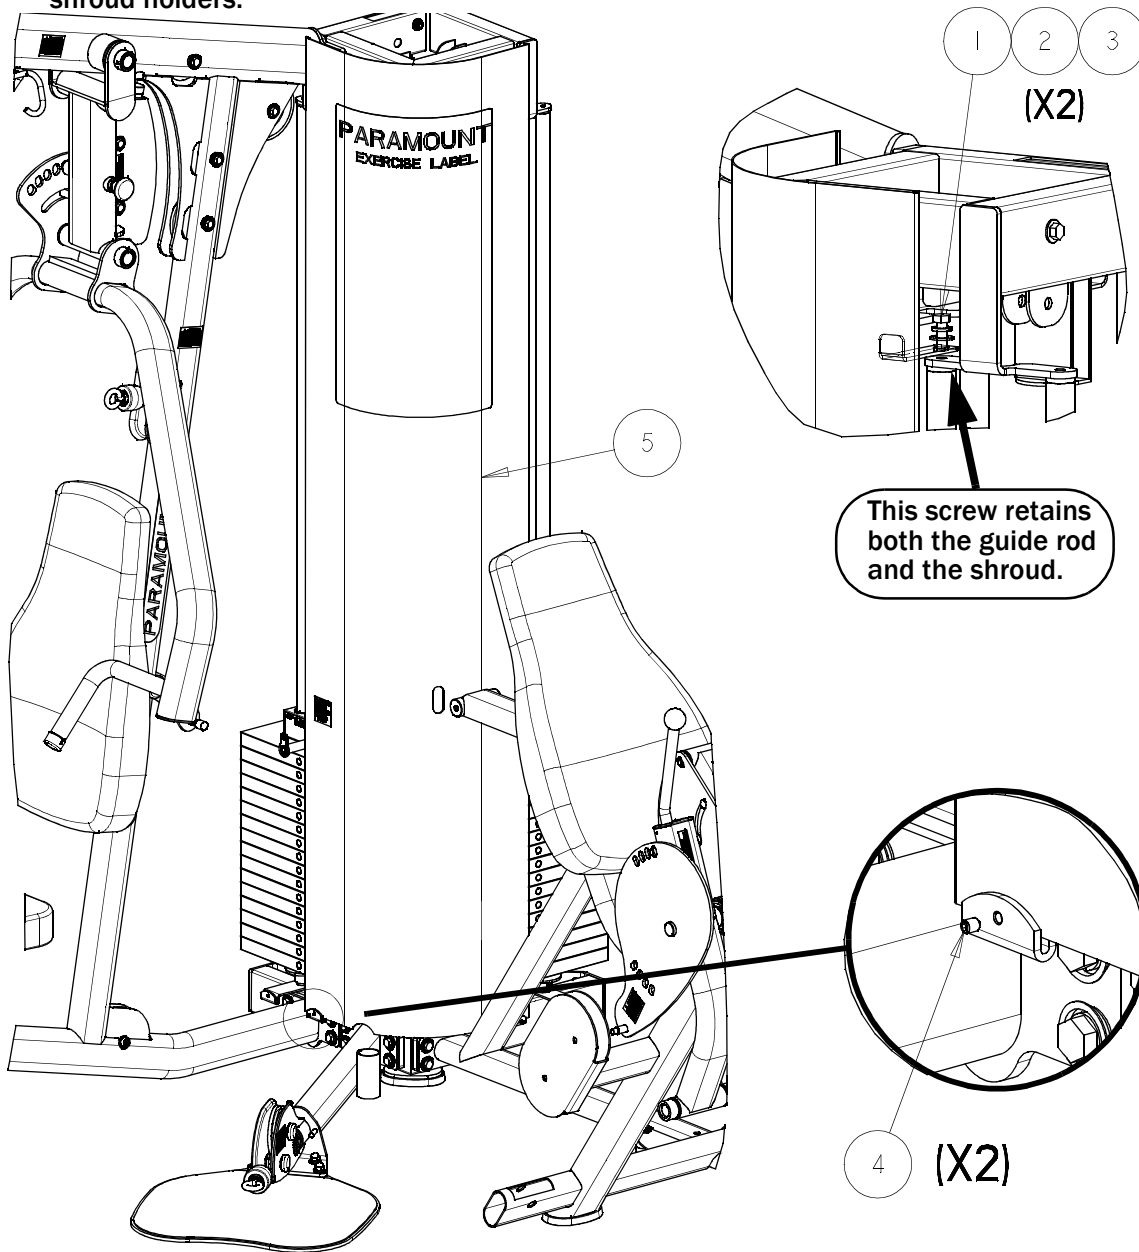

# STEP 15: ASSEMBLE THE LEG EXT/CURL BRACE

- 1. After the front shroud is assembled, the LELC storage hook will attach to both the LELC frame and upright frame.
- 2. Slide the storage hook through the cut-out in the front shroud as shown.
- 3. Loosely assemble ALL the hardware shown in this step.
- 4. After aligning all component edges and surfaces, tighten the hardware.

COMPONENTS REQUIRED			
ITEM	PART NO.	DESCRIPTION	QTY
1	C-445	SCREW, HEX, 3/8-16 X 1, GR 5, ZP	1
2	C-450	SCREW, HEX, 3/8-16 X 2-1/2, GR 5, ZP	2
3	C-749	WASHER, LOCK, 3/8, ZINC	3
4	C-754C	WASHER, FLAT, 3/8 SAE, ZP	3
5	C_955A	BASE, BOLT COVER, 3/8	1
6	P04-1379	STORAGE HOOK	1

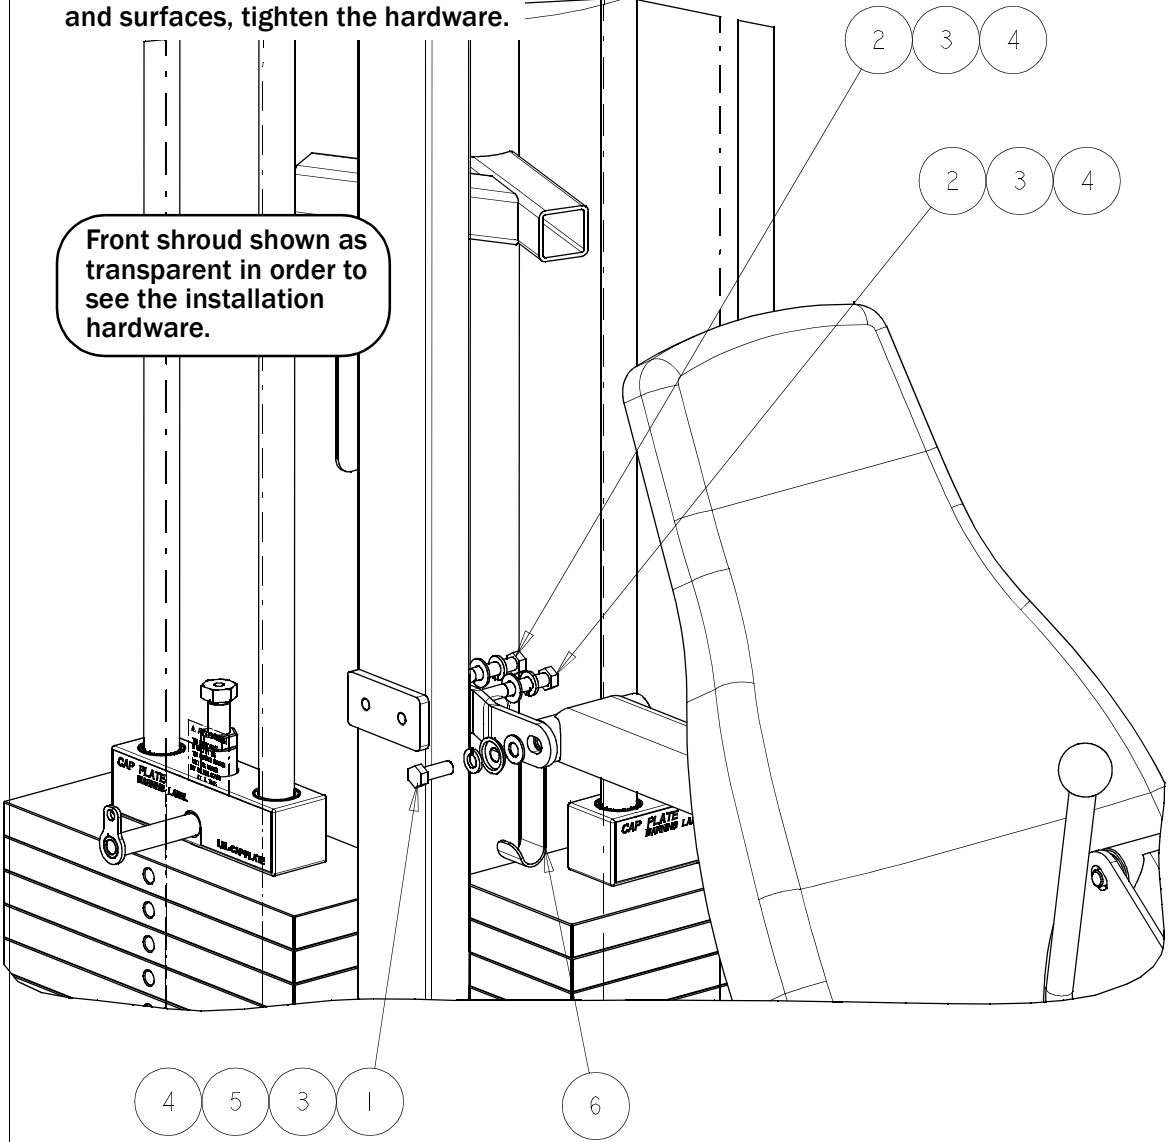



# STEP 16: ASSEMBLE THE REAR SHROUDS


1. Assemble the Shrouds as shown.

2. Install the hex head screws.

3. Install the Allen screws in the rear of the Shrouds.

4. Install the set screws in the front of the shrouds.

ITEM	PART NO.	DESCRIPTION	QTY
1	C-445	SCREW, HEX, 3/8-16 X 1, GR 5, ZP	2
2	C-749	WASHER, LOCK, 3/8, ZINC	2
3	C-752	WASHER, FLAT, 1/4 SAE, ZP	4
4	C-675D	SCREW, BHCS, 1/4-20 X 1/2	4
5	C-754C	WASHER, FLAT, 3/8 SAE, ZP	2
6	CPSS-1032XIQ	SET SCREW, 10-32 X 1/4"	2
7	P04-1362	SHROUD, CP	1
8	P04-1364	SHROUD, LP	1

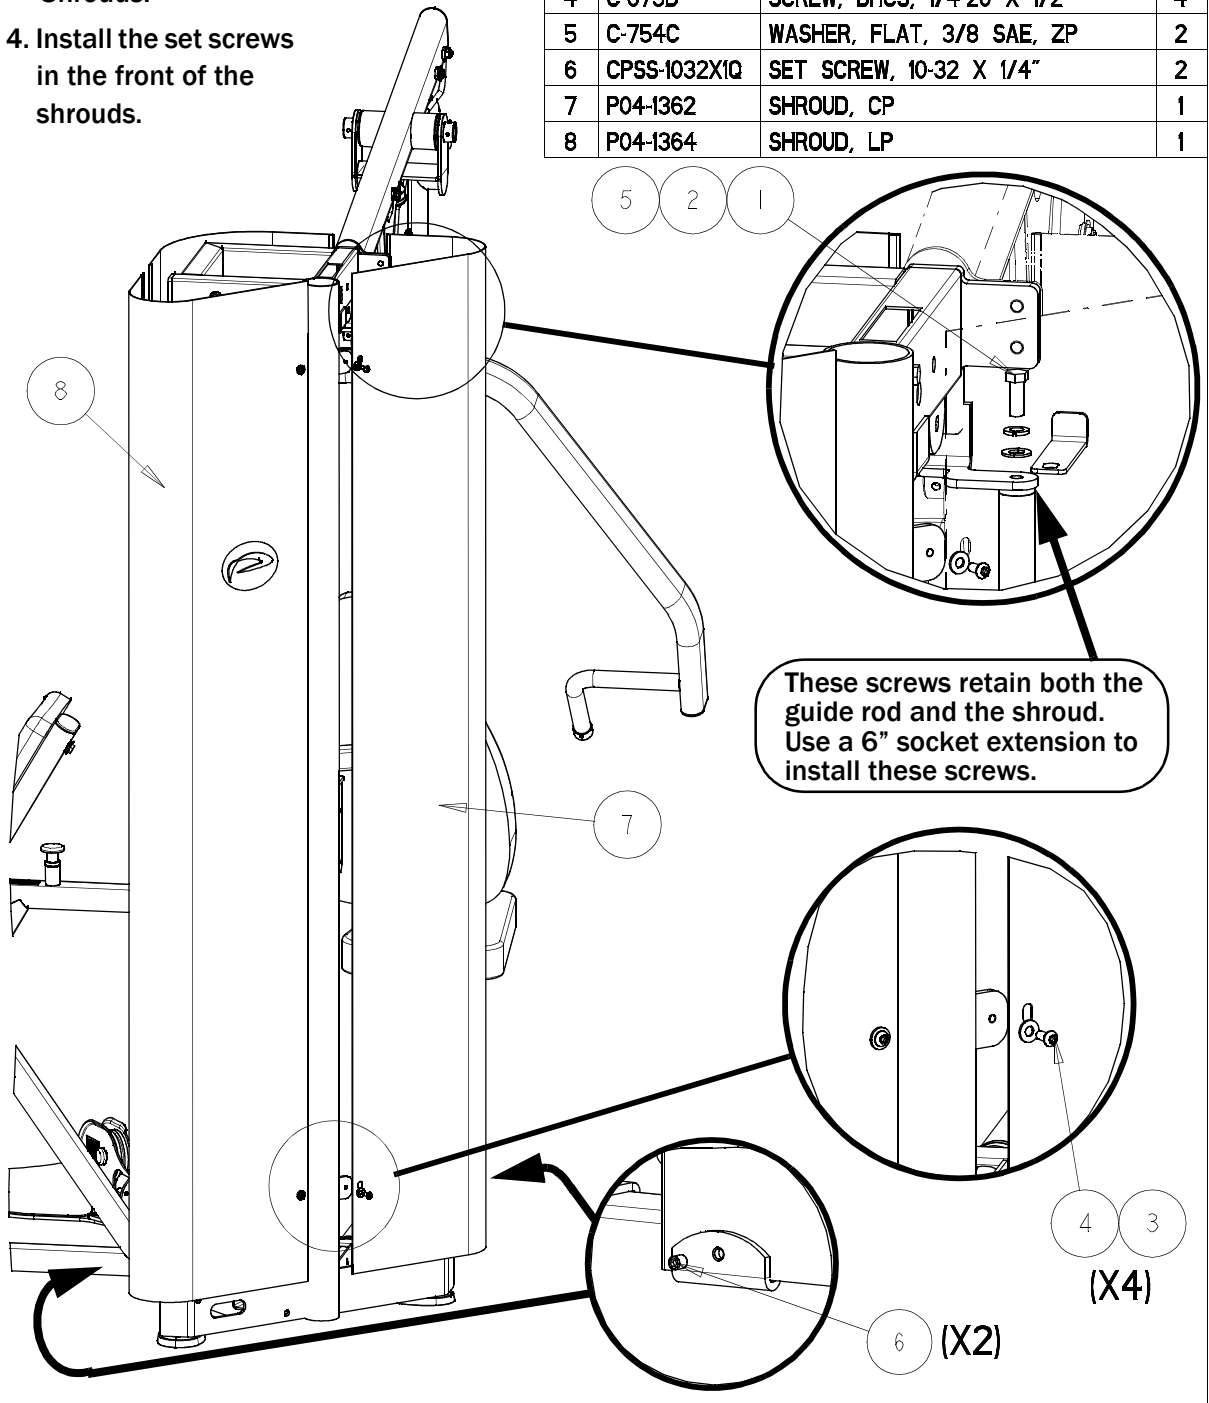


## STEP 17: PLACE THE WEIGHT STACK LABELS



1. Apply a weight stack label to the shroud next to each weight stack.

ITEM	PART NO.	DESCRIPTION	QTY
1	LBL-WGT	LABEL, WGT STK - 170# or 250#	2

2. Locate the sticker on the shroud so that it is about 1/4" from the edge and numbers line up with their corresponding weight plate.

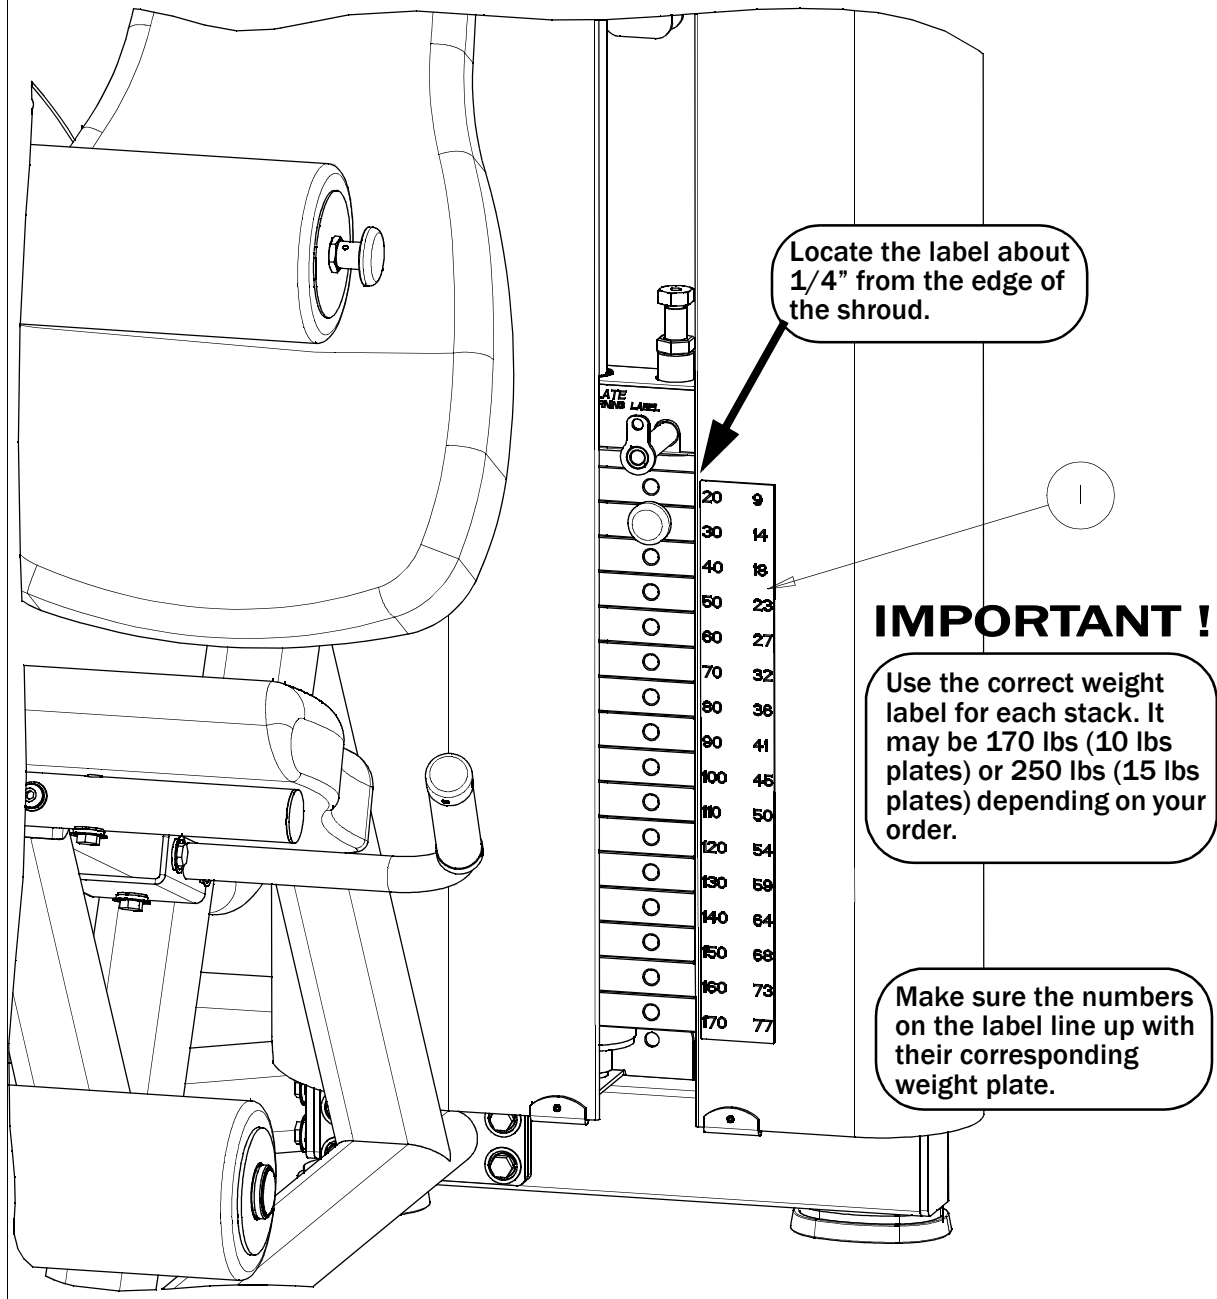

## STEP 18: INSTALL THE BOLT CAPS

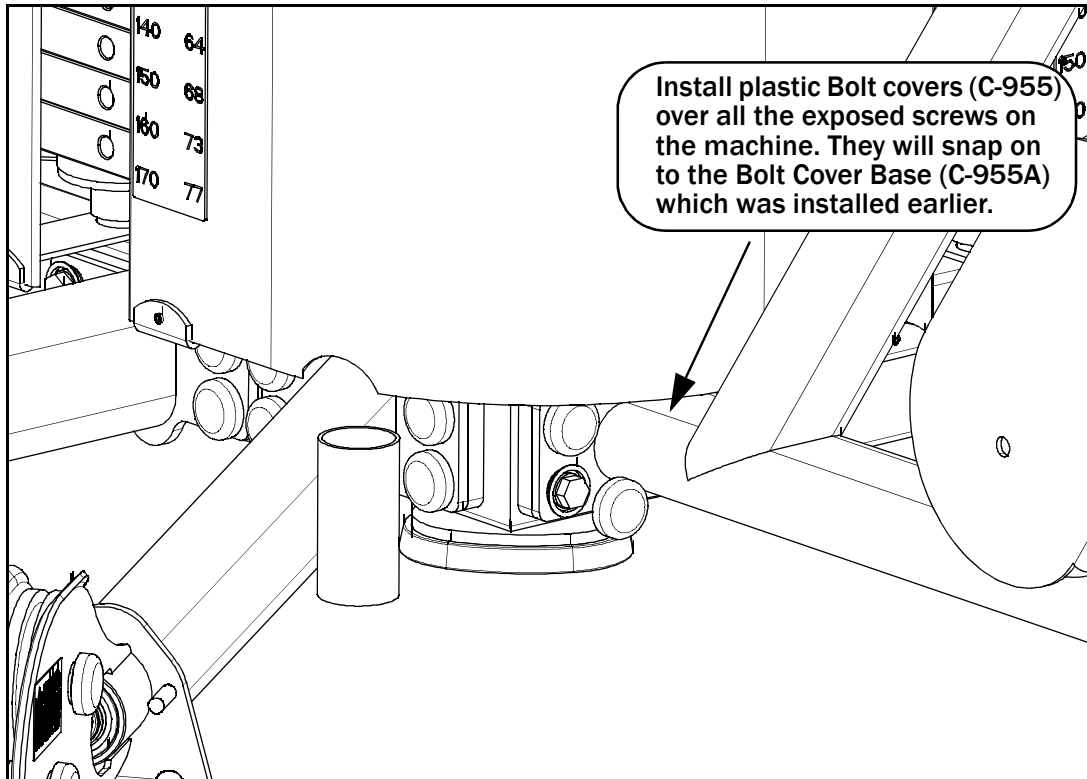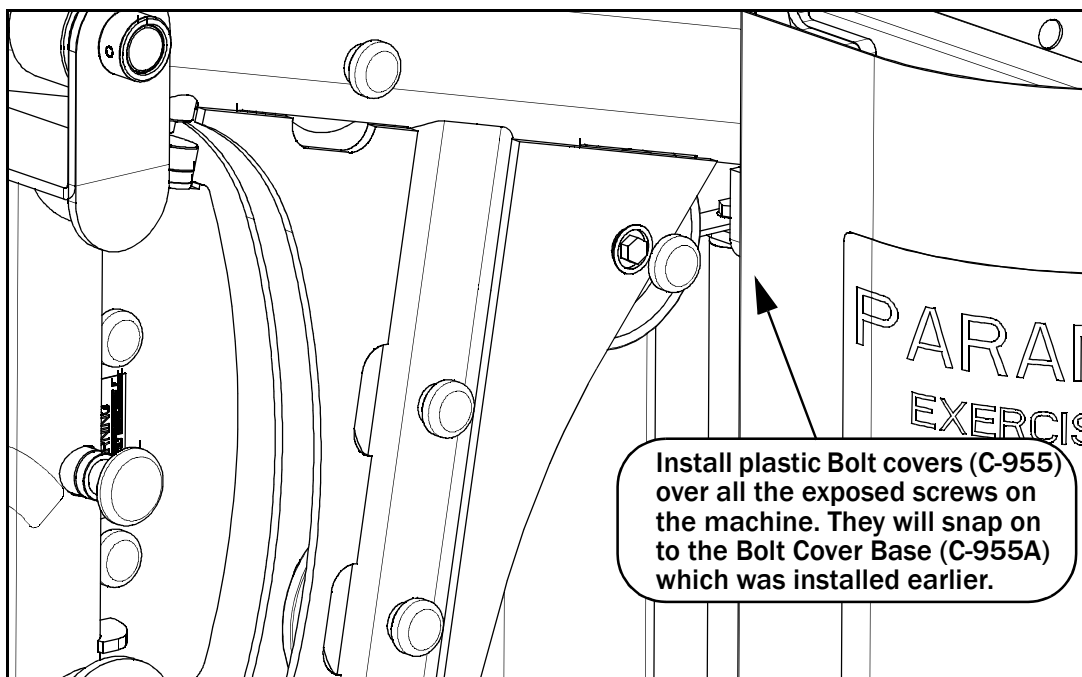


# LEG PRESS LABEL

1. The Dual User Label must be used **only** when the Leg Press option is attached.

2. After the Shrouds have been assembled, apply the label to the Shroud on the Leg Press side as shown.

ITEM	PART NO.	DESCRIPTION	QTY
1	MD000180	LABEL, DUAL USER	1

**ATTENTION**  
THIS WEIGHT STACK IS SHARED BY THE TWO ADJACENT STATIONS. ONLY ONE PERSON MAY EXERCISE ON EITHER OF THESE STATIONS AT A TIME.  
MD000180

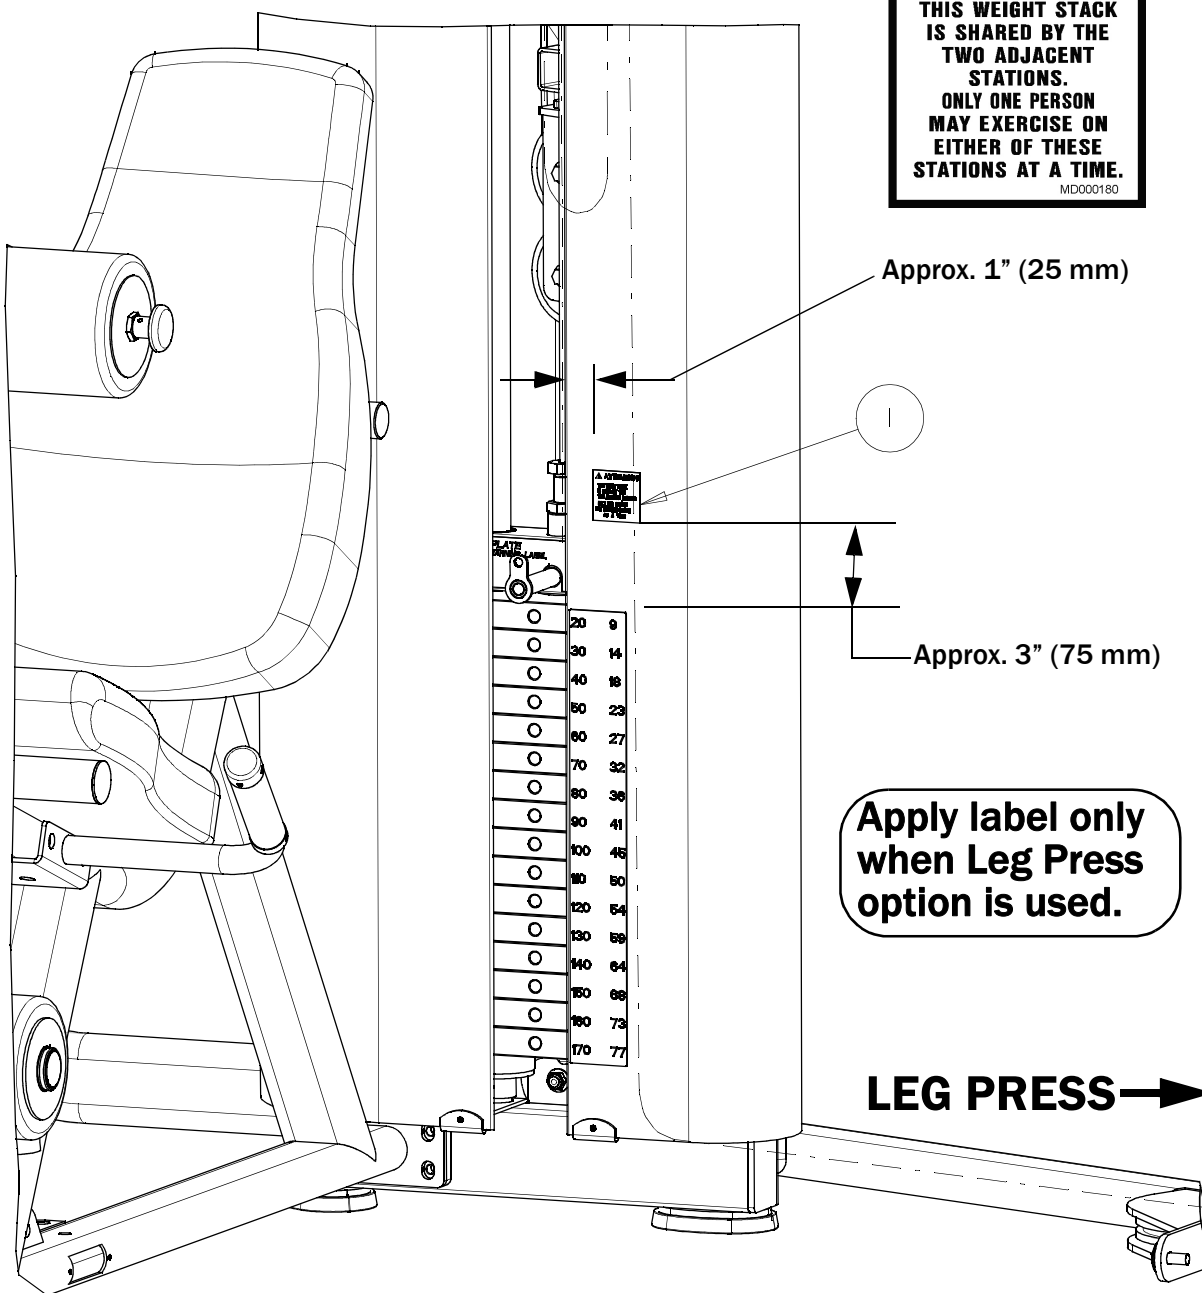

# PROCEDURE LABEL

This is the Procedure Label required for the MP 2.0 and MP 2.5. If this label is missing or becomes damaged, Paramount will replace it free of charge.

## PARAMOUNT®

MP2.0 + MP2.5

UPPER BODY STATION
LOW PULLEY STATION
LEG STATIONS



**Supine Chest Press**  
PECTORALIS  
Anterior Deltoid



**Incline Chest Press**  
PECTORALIS  
ANTERIOR DELTOID



**Biceps Curl**  
BICEPS  
BRACHIALIS



**Seated Leg Extension**  
QUADRICEPS



**Shoulder Press**  
DELTOIDS  
Pectoralis



**Seated Row**  
LATISSIMUS DORSI  
RHOMBIDS



**Upright Row**  
TRAPEZIUS  
LATERAL DELTOIDS



**Seated Leg Curl**  
HAMSTRINGS



**Lat Pulldown**  
LATISSIMUS DORSI



**Triceps Pushdown**  
TRICEPS



**Inner / Outer Thigh**  
ADDUCTORS (Inner)  
ADDUCTORS (Outer)



**Seated Leg Press**  
QUADRICEPS + HAMSTRINGS  
GLUTEUS MAXIMUS



**Overhead Triceps Extension**  
TRICEPS



**Ab Crunch**  
RECTUS ABDOMINUS



**Lateral Raise**  
DELTOIDS  
TRAPEZIUS



**Seated Calf Press**  
GASTROCNEMIUS  
SOLEUS

**MAINTENANCE SCHEDULE**

Check the integrity and function of the following items. Replace all worn components immediately.

Item	Frequency
Cables:	<ul style="list-style-type: none"> <li>Check tension, and fittings and coating.</li> <li>Replace cables annually.</li> </ul>
Upholstery:	<ul style="list-style-type: none"> <li>Wipe down and dry.</li> <li>Clean and condition.</li> </ul>
Frame:	<ul style="list-style-type: none"> <li>Wipe down and dry.</li> <li>Pull/Vibex.</li> </ul>
Chrome:	<ul style="list-style-type: none"> <li>Wipe down and dry.</li> <li>Pull/Vibex.</li> </ul>
Nuts/Bolts:	<ul style="list-style-type: none"> <li>Tighten and/or adjust as needed.</li> </ul>
Rollers:	<ul style="list-style-type: none"> <li>Clean and lubricate.</li> </ul>
Steel Slides:	<ul style="list-style-type: none"> <li>Clean and lubricate.</li> </ul>
Adjustments/Locking Pins/Tightening Knobs:	<ul style="list-style-type: none"> <li>Check and adjust as needed.</li> </ul>
Weight Stack Pin:	<ul style="list-style-type: none"> <li>Check and adjust as needed.</li> </ul>
Warning/Instruction Labels:	<ul style="list-style-type: none"> <li>Check and replace if damaged.</li> </ul>
Rest-Dial:	<ul style="list-style-type: none"> <li>Check and replace if damaged.</li> </ul>
Hand Grips:	<ul style="list-style-type: none"> <li>Check and replace if damaged.</li> </ul>

For recommended maintenance products please refer to the MP2.0 owner's manual or Paramount's Web site at [www.paramountfitness.com](http://www.paramountfitness.com)

Paramount Fitness Corp. ©2006  
Los Angeles, CA  
[www.paramountfitness.com](http://www.paramountfitness.com)  
MC0007 Printed 2/06

**WARNING** SERIOUS INJURY CAN OCCUR ON THIS EQUIPMENT. FOLLOW THESE PRECAUTIONS TO HELP AVOID INJURY.

- BEFORE USING: Read and understand all of the warnings and obtain instruction on the use of this machine. Use only for the intended exercise. DO NOT modify the machine.
- Get a medical exam before beginning an exercise program.
- Keep body and clothing clear of all moving parts. DO NOT wear anything loose or dangling.
- Inspect the machine before use. DO NOT use if it appears damaged. DO NOT try to fix any machine.
- INSPECT MACHINE DAILY for loose, worn or damaged parts. Replace any part or label at first signs of wear. If you are in doubt about any part, DO NOT use the machine until the part is replaced.
- Inspect all cables and connections before using the machine. DO NOT use this machine if any cable appears worn or damaged.
- Be certain that weight pin is completely inserted. Use only the pin provided by the manufacturer. If unsure, seek assistance.
- NEVER pin weights or top plate into an elevated position. DO NOT use the machine if found in this condition.
- DO NOT try to fix.
- DO NOT use incremental adder weights with this machine. DO NOT use dumbbells or other means to add resistance to machine.
- NEVER allow children near this machine. Supervise teenagers.
- DO NOT REMOVE THIS LABEL. REPLACE IF DAMAGED.




# WARNING LABELS


## Warning Labels

The following are the Warning labels required for the MP 2.0 and MP 2.5. If any of these labels are missing or become damaged, Paramount will replace them free of charge.

Note: these labels are not to scale.




MG000055




MG000057



MG000058

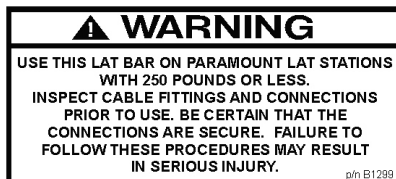

MD000180

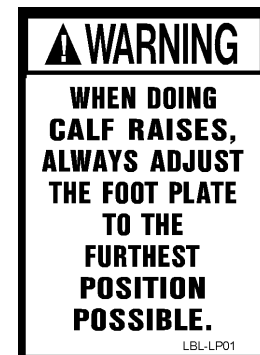

MG000056

If this machine is to be installed in a public use facility, ASTM F1749 requirements specify that the facility sign shown to the right is to be installed in plain view.

If you did not receive the facility sign with your order, you can obtain one free of charge from Paramount by calling 1-800-721-2121.

## BE ALERT!

THE FITNESS EQUIPMENT IN THIS FACILITY PRESENTS HAZARDS WHICH, IF NOT AVOIDED, COULD CAUSE SERIOUS INJURY OR DEATH.

PRIOR TO USING THE EQUIPMENT, READ THE WARNING LABELS AND INSTRUCTION PLACARDS AFFIXED TO EACH MACHINE.

IF YOU ARE UNSURE ON HOW TO USE A MACHINE, SEEK THE ASSISTANCE OF OUR FLOOR PERSONNEL. WE WILL BE HAPPY TO INSTRUCT YOU ON HOW TO USE THE EQUIPMENT PROPERLY.

IMMEDIATELY REPORT ANY PIECE OF EQUIPMENT THAT IS NOT FUNCTIONING PROPERLY TO OUR FLOOR PERSONNEL SO THAT IT MAY BE EVALUATED AND SERVICED PROMPTLY.

DO NOT ATTEMPT TO USE OR FIX ANY PIECE OF EQUIPMENT THAT IS NOT FUNCTIONING PROPERLY


ASTM F1749-96

## **HOW TO OBTAIN SERVICE**

For warranty service, contact an Authorized Paramount Dealer or a Paramount Customer Service representative at 1-800-721-2121 or 1-323-721-2121. Or by E-mail at [nasales@paramountfitness.com](mailto:nasales@paramountfitness.com). Before you call, please have the following information ready.

- **Model Number:** MP2.0 or MP2.5
- **Serial Number:** \_\_\_\_\_
- **Date of Installation:** \_\_\_\_\_
- **A brief description of the problem**

The serial number is located on the rear of the upright frame at the bottom as shown.

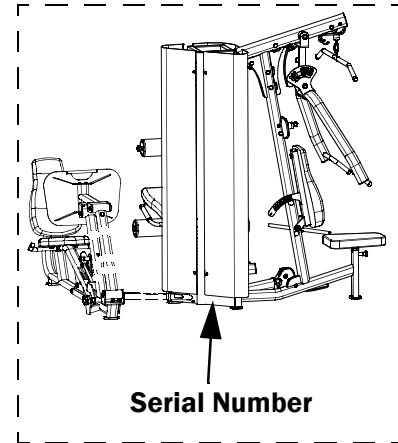

## **FINAL CHECK**

1. If you haven't already done so, lubricate the guide rods and seat adjustment tubes with a teflon spray lubricant. Paramount recommends using TriFlow™ brand.
2. Adjust the arms through each position. Verify that the adjustment pins insert freely into each position and are fully engaged.
3. Place the selector pin into the holder on the cap plate. Pull the Lat cable out slowly until the cap plate tops out against the top upright frame. Verify that the cable moves freely, without any binding.
4. Verify that the selector pin can be inserted into each weight plate.
5. Perform the exercise on each station to verify the cable routes smoothly and the machine operates correctly.

# PARAMOUNT LIMITED WARRANTY

---

READ PARAMOUNT'S WARRANTY SET FORTH BELOW PRIOR TO USING PARAMOUNT PRODUCTS. BY INITIAL USE OF PARAMOUNT PRODUCT YOU ARE CONSENTING TO BE BOUND BY THE FOLLOWING WARRANTY TERMS AND CONDITIONS. THE WARRANTY PERIODS COMMENCE ON THE INVOICE DATE OF THE ORIGINAL PURCHASE. LABOR COVERED DURING WARRANTY PERIODS REQUIRES PRIOR AUTHORIZATION OF PARAMOUNT. PARAMOUNT WARRANTS TO THE ORIGINAL BUYER OF ALL NEW EQUIPMENT PURCHASED FROM A PARAMOUNT AUTHORIZED DEALER OR FROM A PARAMOUNT AUTHORIZED MANUFACTURING CONTRACTOR THAT THESE PRODUCTS WILL BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP UNDER NORMAL USE AND SERVICE FOR THE FOLLOWING PERIODS AND IN THE FOLLOWING RESPECTS:

## **STRENGTH PRODUCTS**

- TEN YEAR WARRANTY COMMERCIAL PRODUCTS – Frame Components and Welds excluding coatings
- FIVE YEAR WARRANTY - Bronze Bushings, Sealed Rotating Bearings, Pulleys, Weight plates and Guide Rods excluding coatings
- ONE YEAR WARRANTY - Cables, Linear Bearings and Shafts and all other components not mentioned elsewhere in this warranty
- 90-DAY WARRANTY - Normal wear parts including but not limited to labels, upholstered pads and grips
- ONE YEAR WARRANTY – Labor

THE SHIPPING MODE OF PARTS REPLACED UNDER WARRANTY TO BE DETERMINED BY PARAMOUNT. PARTS REPLACED UNDER WARRANTY CARRY THE REMAINING ORIGINAL WARRANTY PERIOD OR 90 DAYS, WHICHEVER IS LONGER.

THIS LIMITED WARRANTY DOES NOT COVER AND NO WARRANTY IS GIVEN WITH RESPECT TO:

- Products not manufactured by Paramount or by an Authorized Paramount Manufacturing Contractor.
- Products which are altered without the express written consent of Paramount.
- Products purchased other than directly from Paramount or through a Paramount Authorized Dealer.
- Defective paint, chrome and other coatings caused by environmental conditions including but not limited to climate conditions, cleaning materials and moisture or humidity coming from HVAC systems.
- All parts including but not limited to frames with cosmetic damage. Such damage includes but is not limited to scratches and dents caused after the initial installation.
- Products not maintained in compliance with Paramount's specifications as shown in the owners' manual and on product labels.
- Products with a missing, unreadable or altered serial tag.
- Labor for components beyond their warranty coverage.
- On site service calls to solve installation errors or to provide technical training on the proper use and servicing of the equipment.

THIS WARRANTY APPLIES UNDER THE FOLLOWING CONDITIONS.

- These products have not been subjected to misuse, abuse, modifications not authorized by Paramount or any damage caused by improper handling, natural disasters, acts of God or servicing by non-Authorized Dealers. This includes but is not limited to the relocation of the product and the application of cleaning materials or lubricants not specified by Paramount.
- These products remain in possession of the original purchaser.
- Warranty claims are made within the warranty periods previously shown and that such claims occur within 30-days after the date of discovery.
- Labor coverage applies only within the United States and Canada.
- Warranties for parts and labor may vary outside the United States. Contact the Paramount Dealer within your geographic area for warranty terms.

THE OBLIGATION OF PARAMOUNT UNDER THIS WARRANTY IS LIMITED TO REPAIRING OR REPLACING WARRANTED DEFECTIVE PARTS, AS PARAMOUNT MAY ELECT, AT PARAMOUNT'S PLANT IN LOS ANGELES, CALIFORNIA. PURCHASER IS RESPONSIBLE FOR ALL TRANSPORTATION AND INSURANCE COSTS ON RETURNED OR REPLACED EQUIPMENT TO AND FROM PARAMOUNT'S PLANT IN LOS ANGELES. ANY IMPLIED WARRANTY, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND THE IMPLIED WARRANTY OF MERCHANTABILITY, IS LIMITED TO ONE-YEAR DURATION FROM THE DATE OF DELIVERY TO THE ORIGINAL PURCHASER. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THE REMEDY OF REPAIR AND REPLACEMENT IS THE EXCLUSIVE AND SOLE REMEDY OF THE PURCHASER.

PARAMOUNT SHALL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONTINGENT OR CONSEQUENTIAL DAMAGES OF ANY KIND, INCLUDING, BUT NOT LIMITED TO, DAMAGE OF LOSS OF PROPERTY OR EQUIPMENT AND LOST PROFITS AND REVENUE. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. NO ACTION FOR BREACH OF THIS WRITTEN LIMITED WARRANTY OR AN IMPLIED WARRANTY SHALL BE COMMENCED MORE THAN ONE YEAR AFTER THE ACCRUAL OF THE CAUSE OF ACTION. THIS WRITTEN LIMITED WARRANTY IS THE COMPLETE, FINAL AND EXCLUSIVE AGREEMENT OF THE PARTIES WITH RESPECT TO THE QUALITY OR PERFORMANCE OF THE GOODS AND ANY AND ALL WARRANTIES AND REPRESENTATIONS. NO MODIFICATIONS OF THIS LIMITED WARRANTY OR WAIVER OF ITS TERMS SHALL BE BINDING ON EITHER PARTY UNLESS APPROVED IN WRITING BY AN AUTHORIZED CORPORATE OFFICER OF PARAMOUNT. THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS, WHICH MAY VARY, FROM STATE TO STATE. CONTACT PARAMOUNT FITNESS CORP., 6450 E. BANDINI BLVD., LOS ANGELES, CALIFORNIA 90040-3185, FOR A LIST OF AUTHORIZED DEALERS OR BEFORE RETURNING ANY DEFECTIVE EQUIPMENT. PARAMOUNT FITNESS CORP. ©FEBRUARY 1, 2013.